





S230+40 - 50 Hz

Laufrad:
Impeller: Ø 352 mm
Girante:

Feststoffe bis:
Solids up to: 54 mm Ø
Solidi fino a:

Umdrehung:
Speed: 1450 min⁻¹
Velocità:

DRAFT

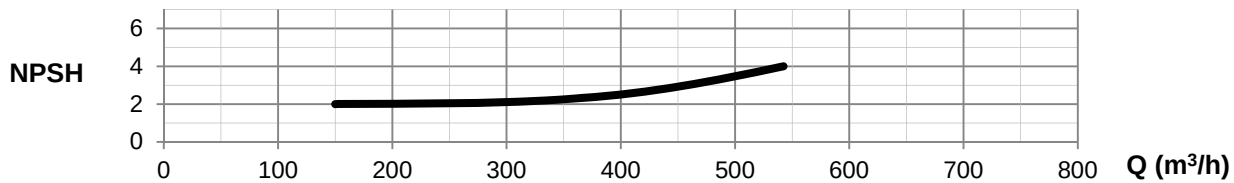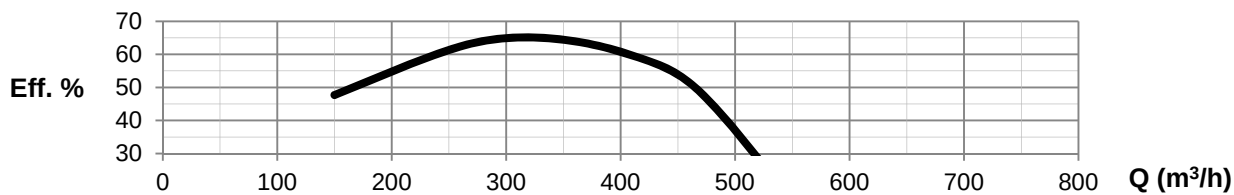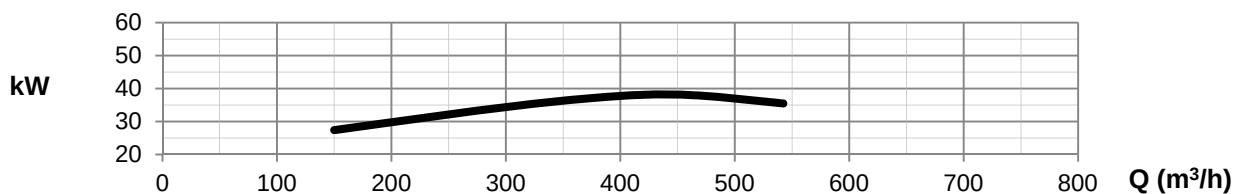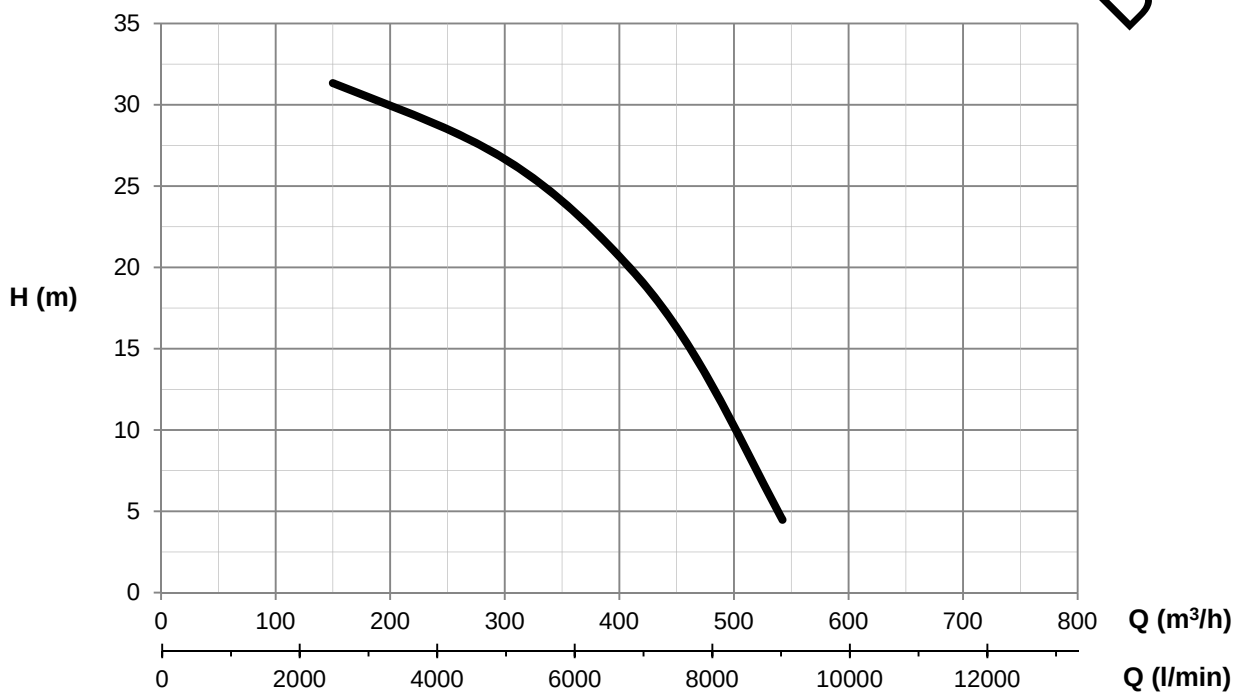

DN200 0 1 2 3 4 5 6 7 m/s