





S 67 - 50 Hz

Laufрад:
Impeller: Ø 270 mm
Girante:

Feststoffe bis:
Solids up to: Ø 24 mm
Solidi fino a:

Umdrehung:
Speed: ~ 1460 min⁻¹
Velocità:

T1605261 270 -> 270mm; 1460 -> 1460rpm

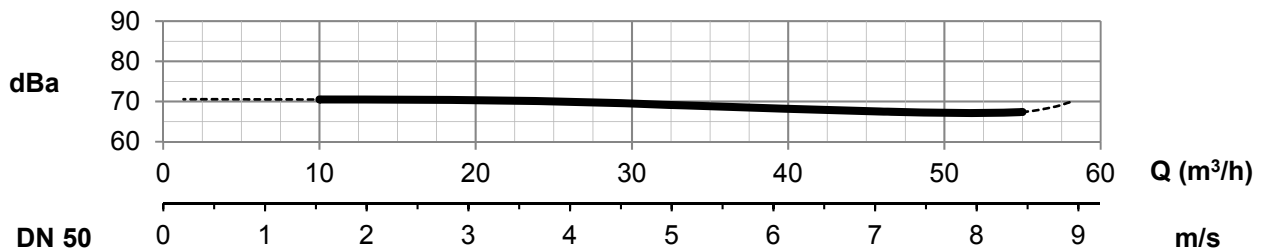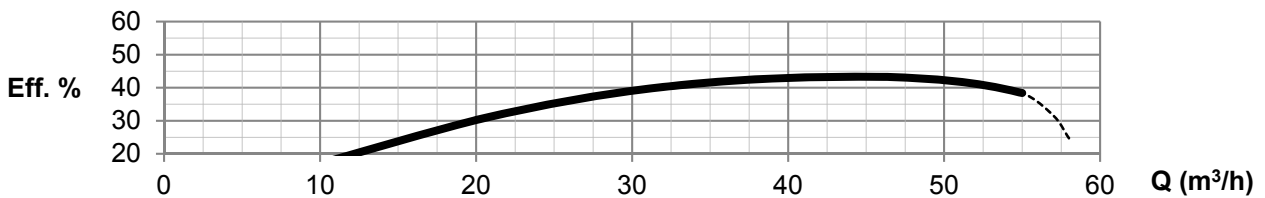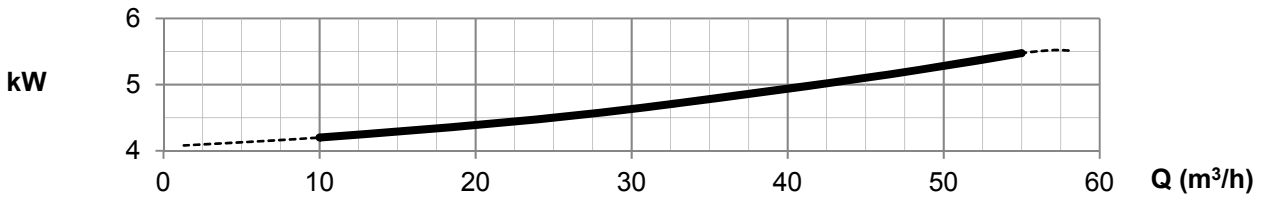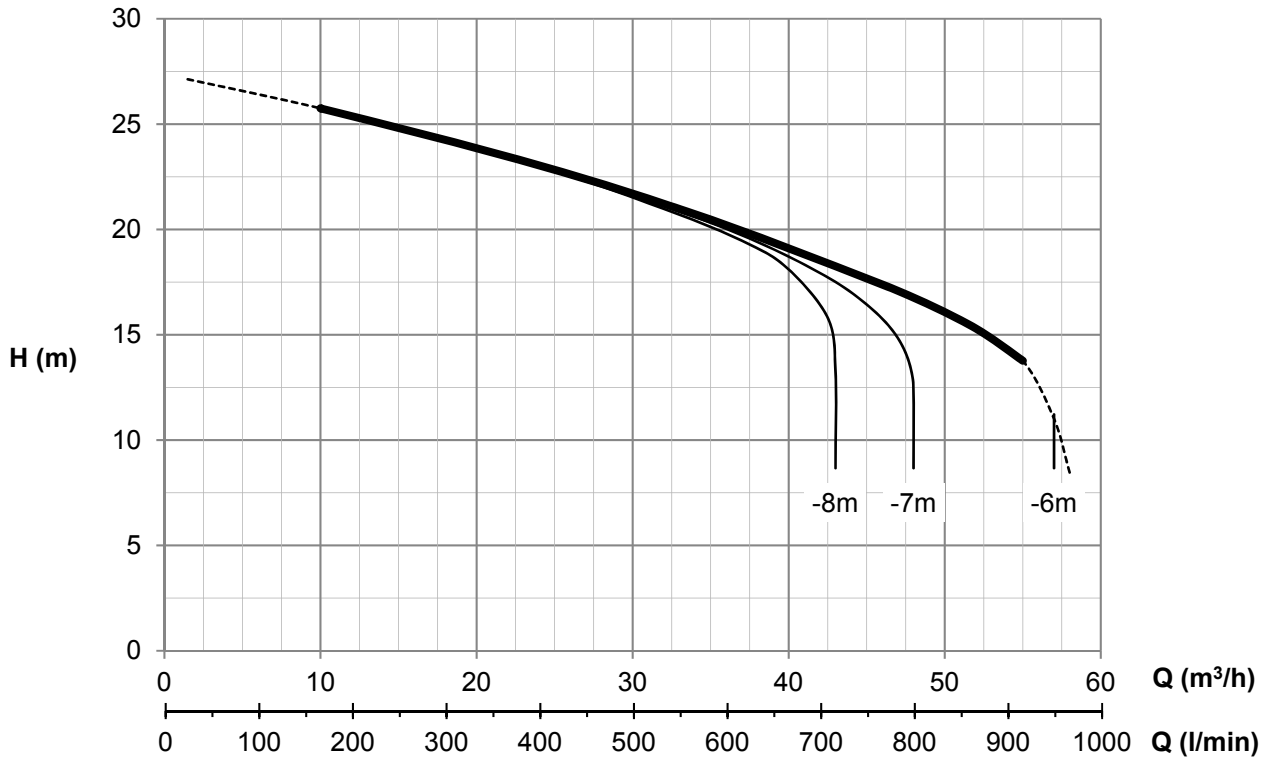

ISO 9906:2012 - GRADE 3B, $\rho = 1 \text{ kg/dm}^3$, $\nu = 1 \text{ mm}^2/\text{s}$

DN 50