





S108(210) - 50 Hz

Laufрад:
Impeller: Ø 210 mm
Girante:

Feststoffe bis:
Solids up to: Ø 35 mm
Solidi fino a:

Umdrehung:
Speed: ~ 2900 min⁻¹
Velocità:

602220 210 -> 210mm; 2900 -> 2900rpm

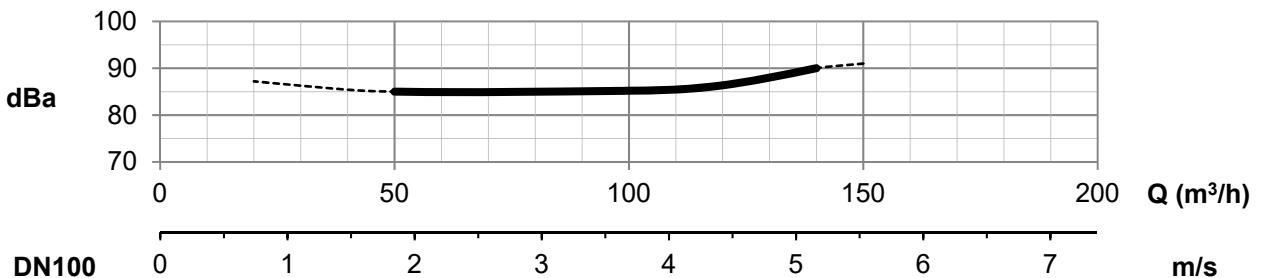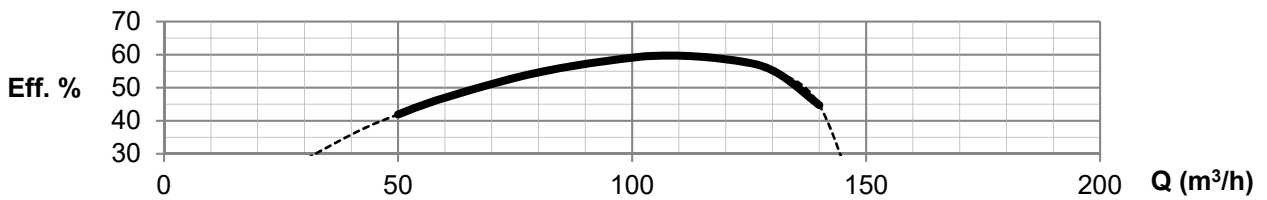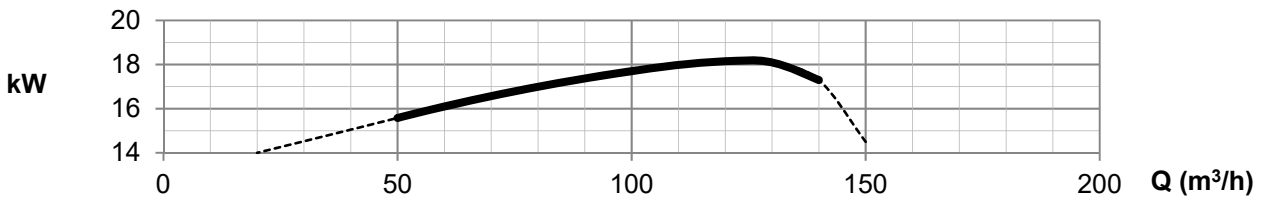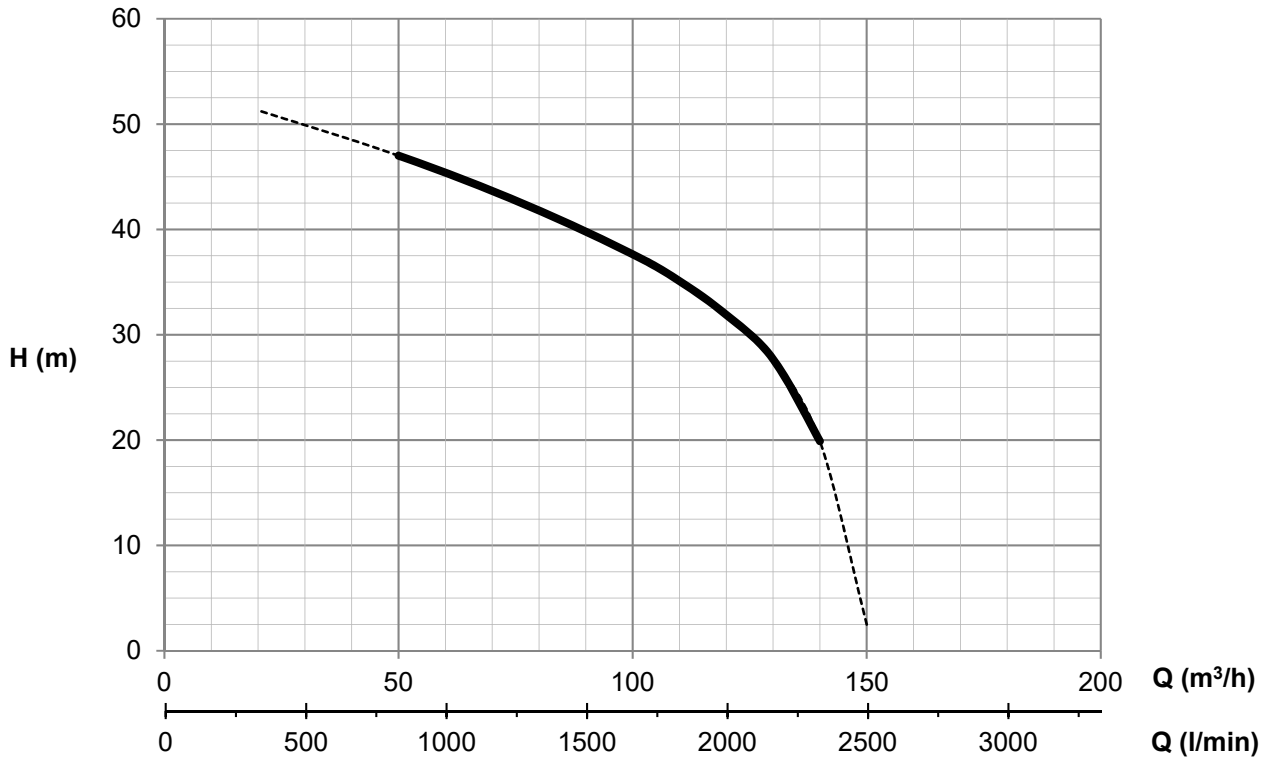

602220