





# S105 - 50 Hz

Laufrad:  
Impeller: Ø 218 mm  
Girante:

Feststoffe bis:  
Solids up to: Ø 45 mm  
Solidi fino a:

Umdrehung:  
Speed: ~ 1460 min<sup>-1</sup>  
Velocità:

T1703041 218 -> 218mm; 1460 -> 1460rpm

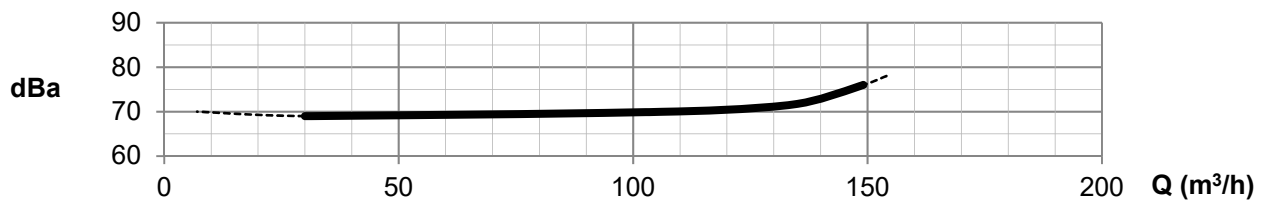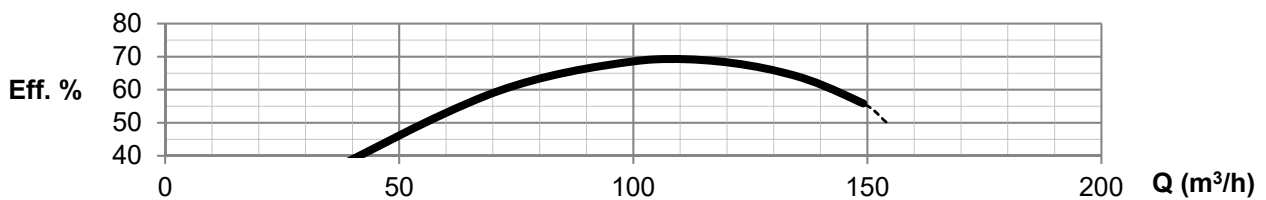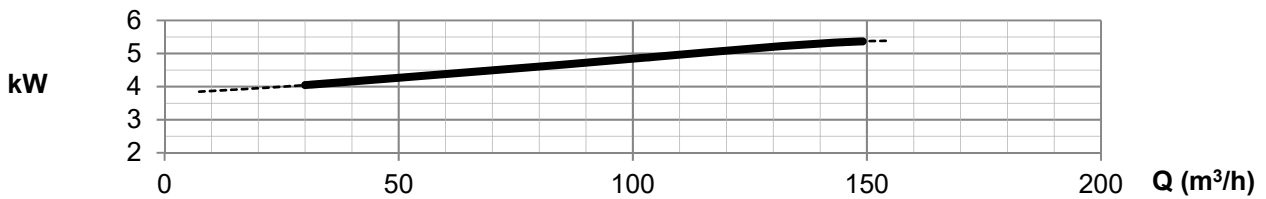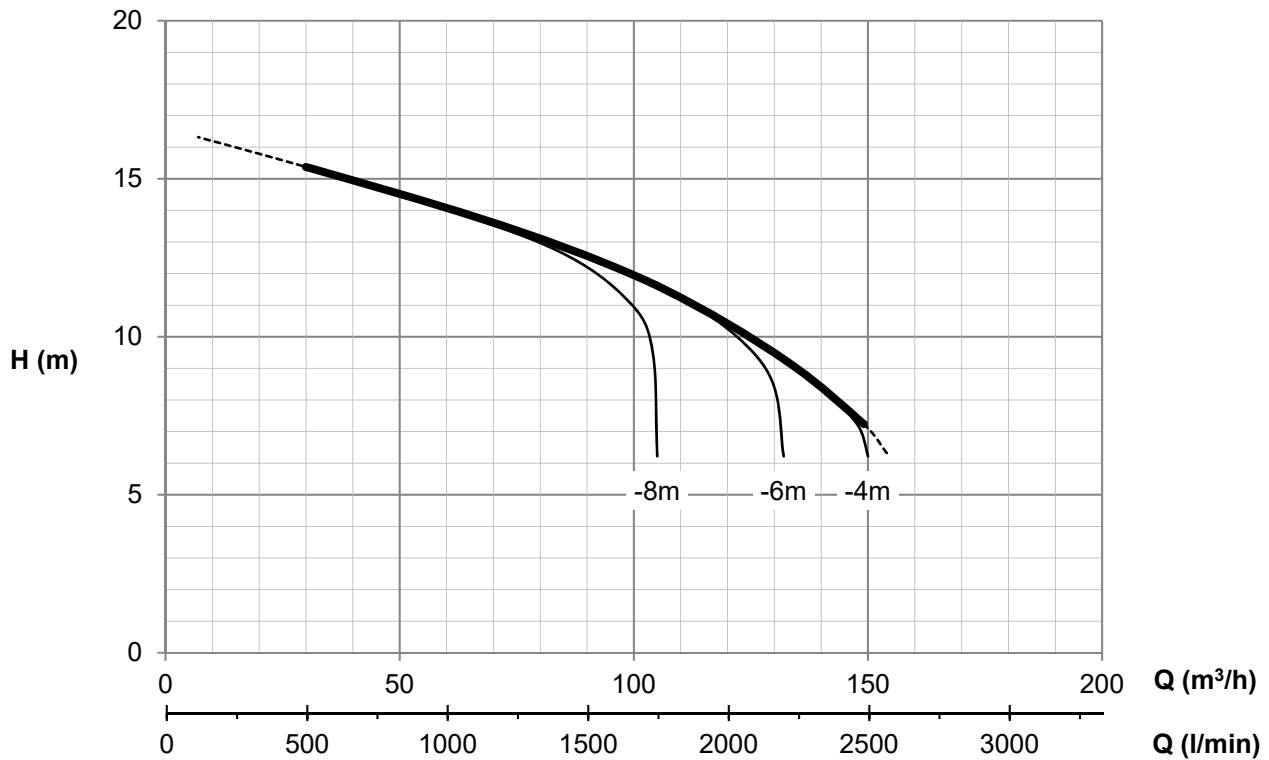

ISO 9906:2012 - GRADE 3B,  $\rho = 1 \text{ kg/dm}^3$ ,  $\nu = 1 \text{ mm}^2/\text{s}$

DN100

0 1 2 3 4 5 6 7 m/s