





# S201+50 - 50 Hz

Laufrad:  
Impeller: Ø 268 mm  
Girante:

Feststoffe bis:  
Solids up to: Ø 57 mm  
Solidi fino a:

Umdrehung:  
Speed: ~ 1450 min<sup>-1</sup>  
Velocità:

P761031 278 -> 268mm; 1450 -> 1450rpm

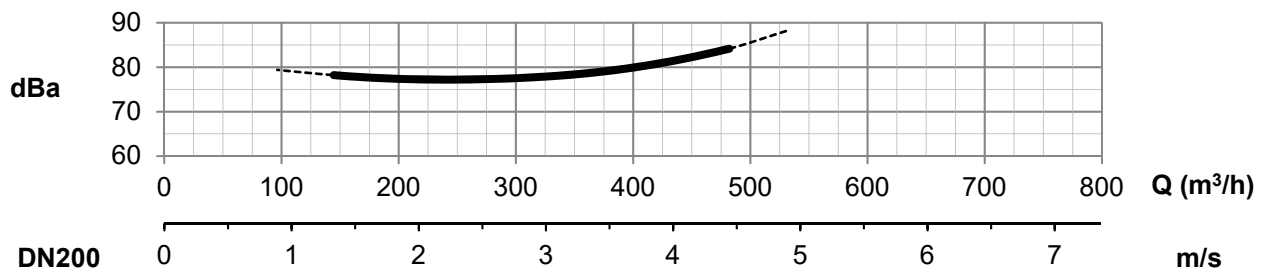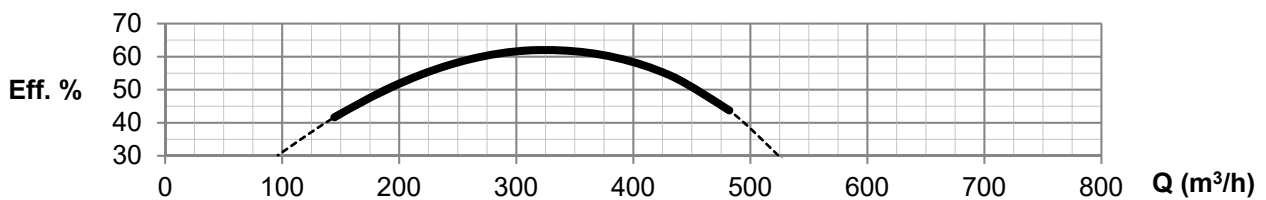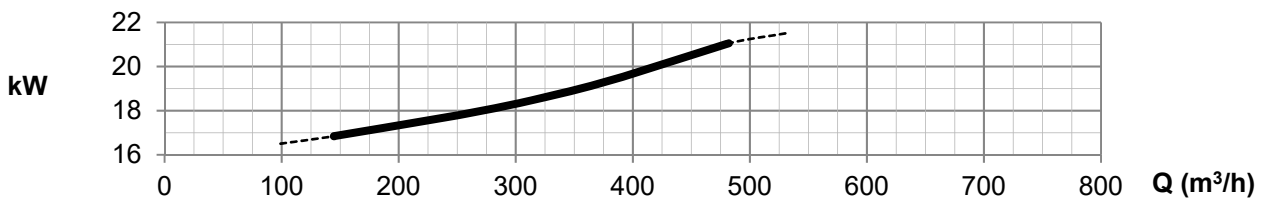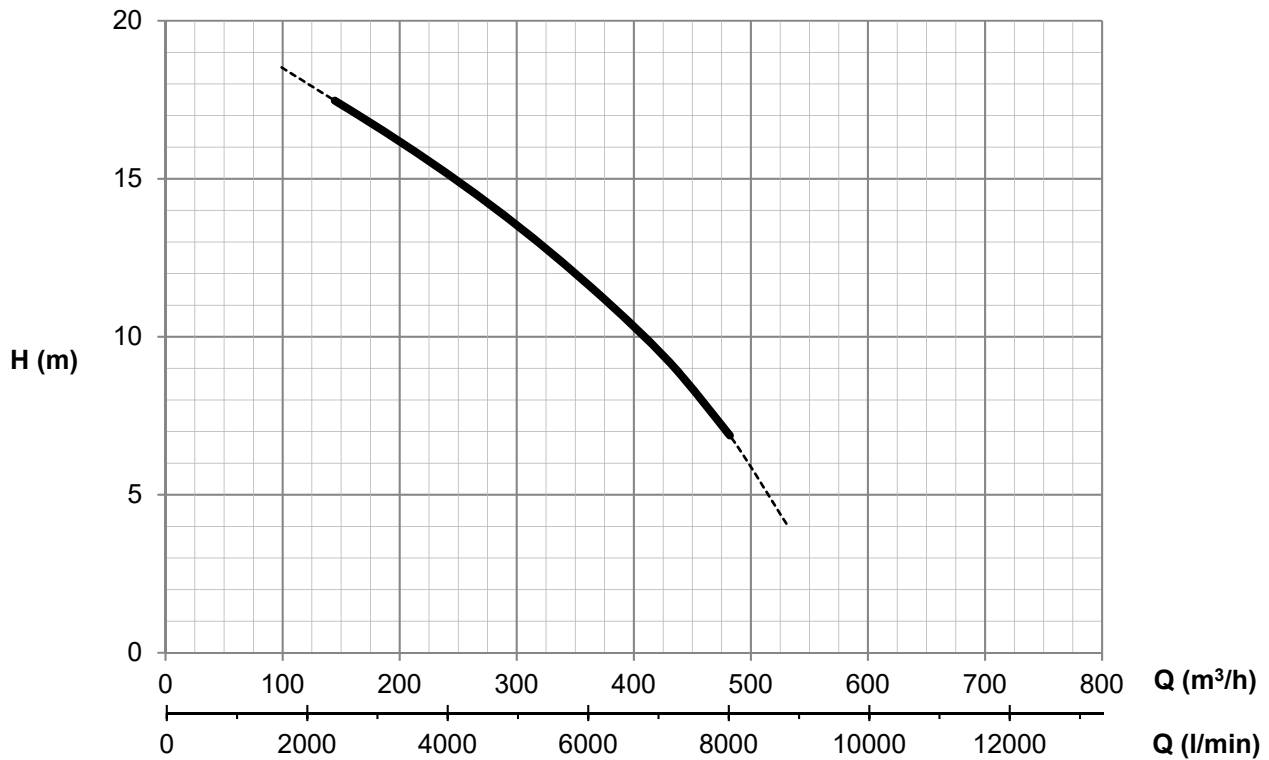

ISO 9906:2012 - GRADE 3B, ρ = 1 kg/dm³, ν = 1 mm²/s, calculated