





S201+60 - 50 Hz

Laufрад:
Impeller: Ø 278 mm
Girante:

Feststoffe bis:
Solids up to: Ø 57 mm
Solidi fino a:

Umdrehung:
Speed: ~ 1450 min⁻¹
Velocità:

P761031 278 -> 278mm; 1450 -> 1450rpm

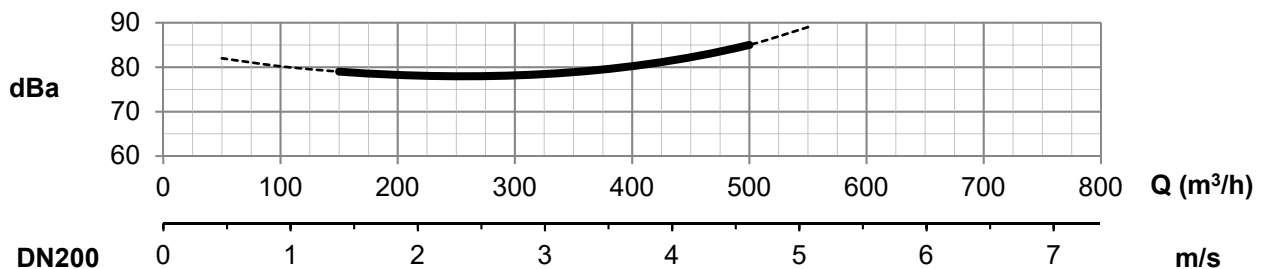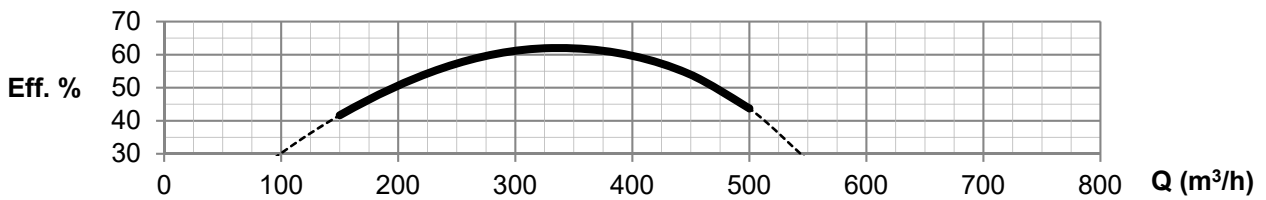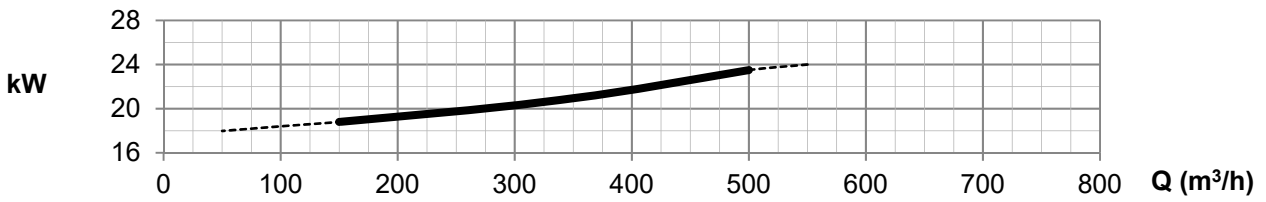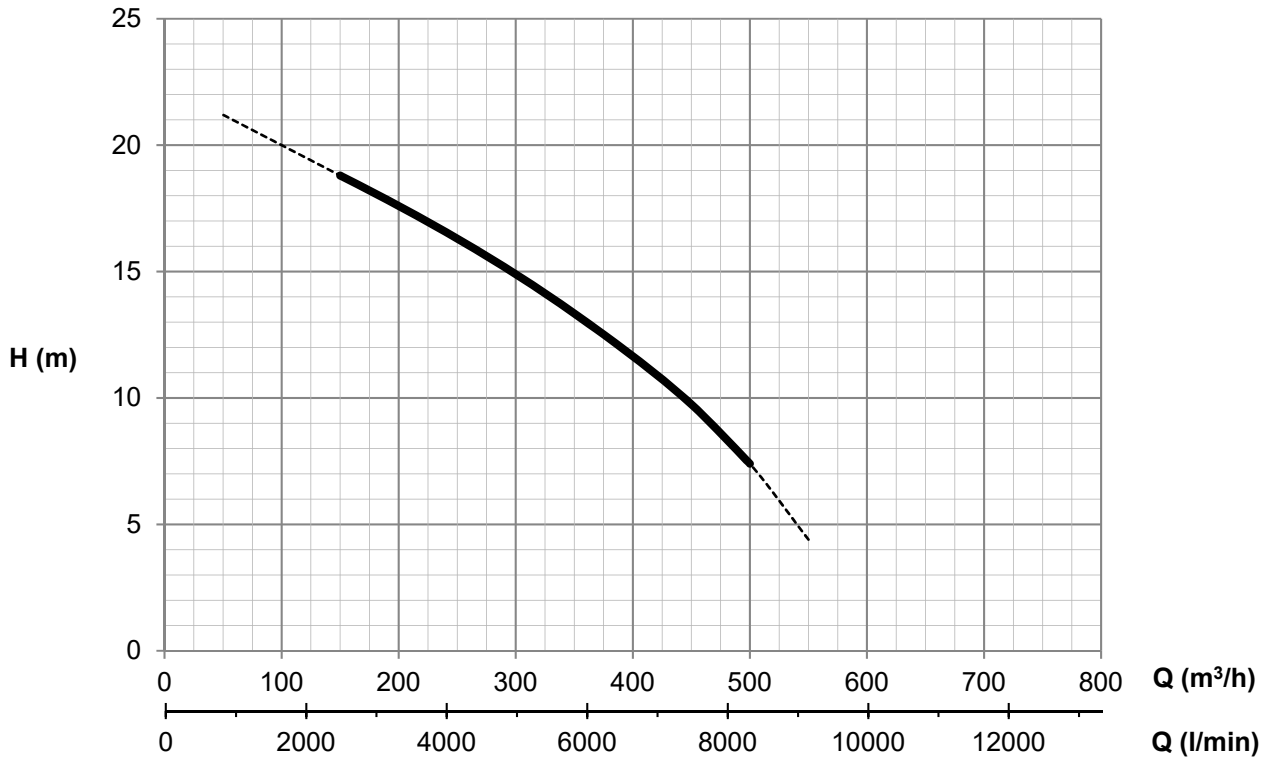

ISO 9906:2012 - GRADE 3B, ρ = 1 kg/dm³, ν = 1 mm²/s, calculated