





S 60+60 - 50 Hz

Laufрад:
Impeller: Ø 165 mm
Girante:

Feststoffe bis:
Solids up to: Ø 24 mm
Solidi fino a:

Umdrehung:
Speed: ~ 2900 min⁻¹
Velocità:

T1804171 170 -> 165mm; 2900 -> 2900rpm

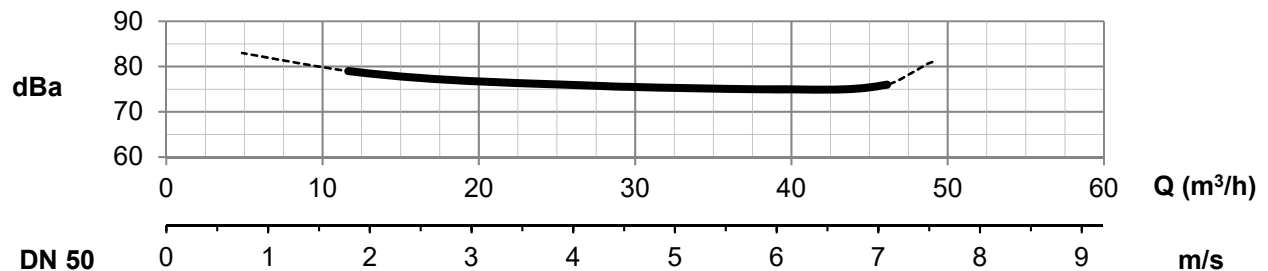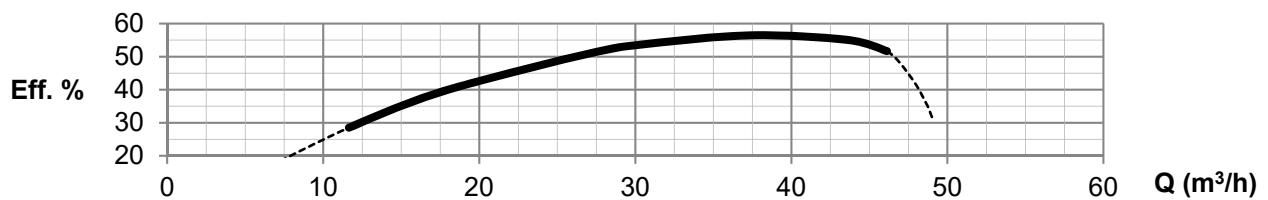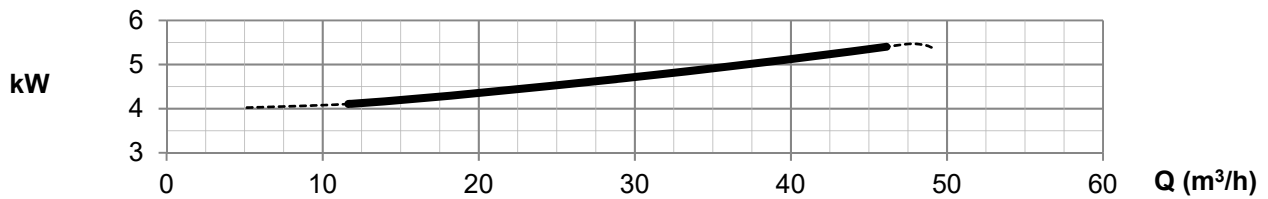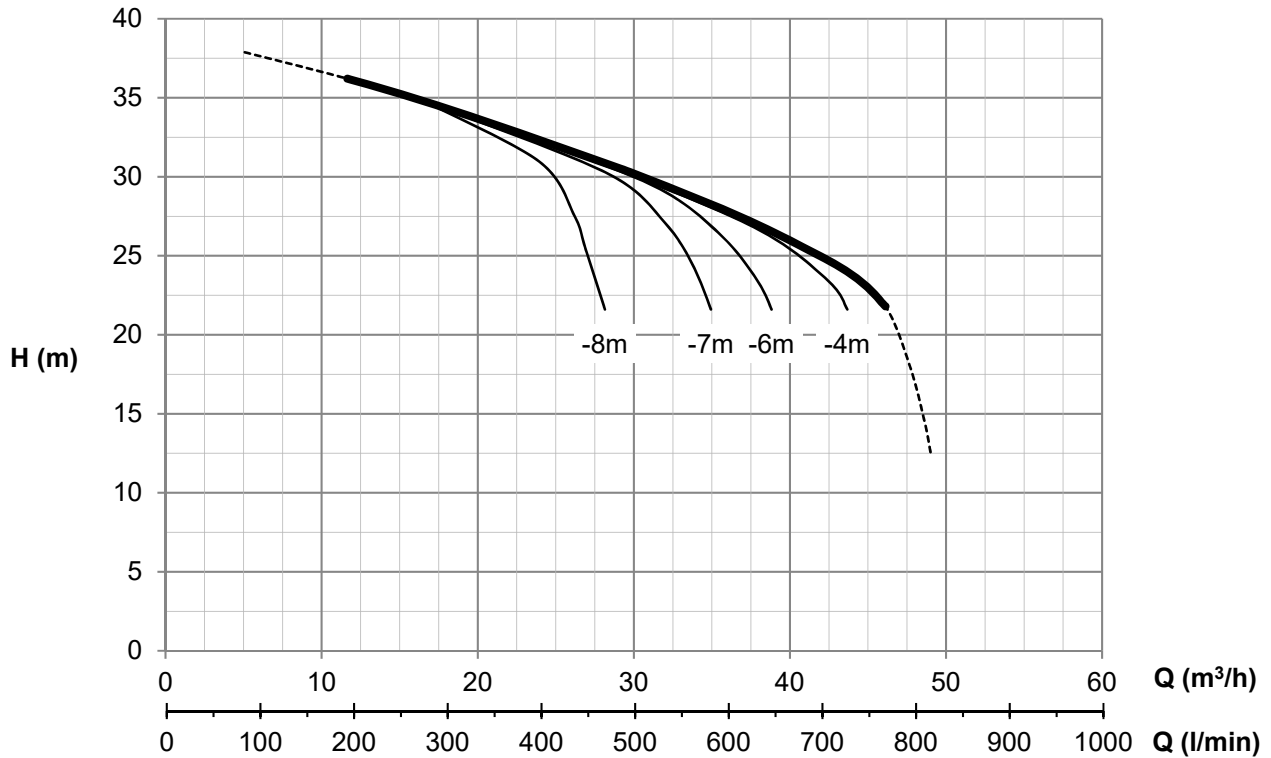

ISO 9906:2012 - GRADE 3B, $\rho = 1 \text{ kg/dm}^3$, $\nu = 1 \text{ mm}^2/\text{s}$

DN 50