





# S 51 - 50 Hz

Laufrad:  
Impeller: Ø 119 mm  
Girante:

Feststoffe bis:  
Solids up to: Ø 25 mm  
Solidi fino a:

Umdrehung:  
Speed: ~ 2900 min<sup>-1</sup>  
Velocità:

T1510141 119 -> 119mm; 2900 -> 2900rpm

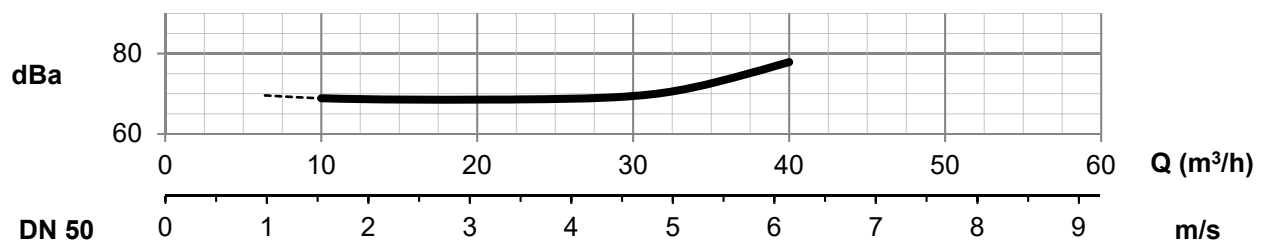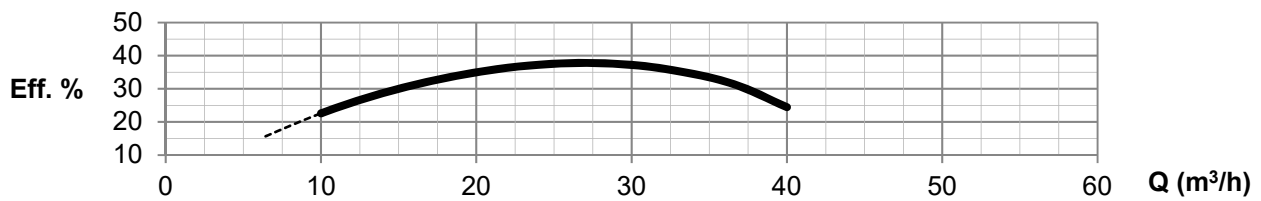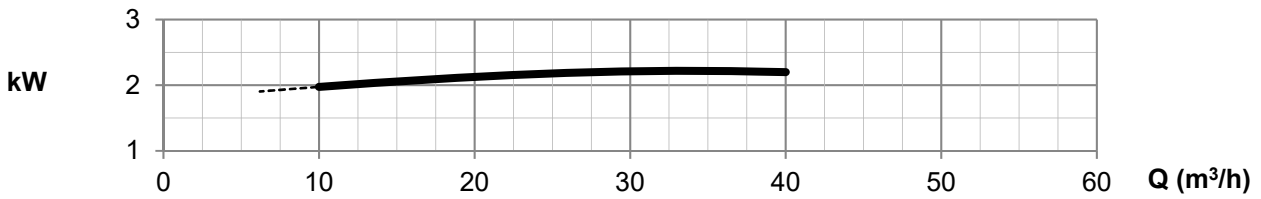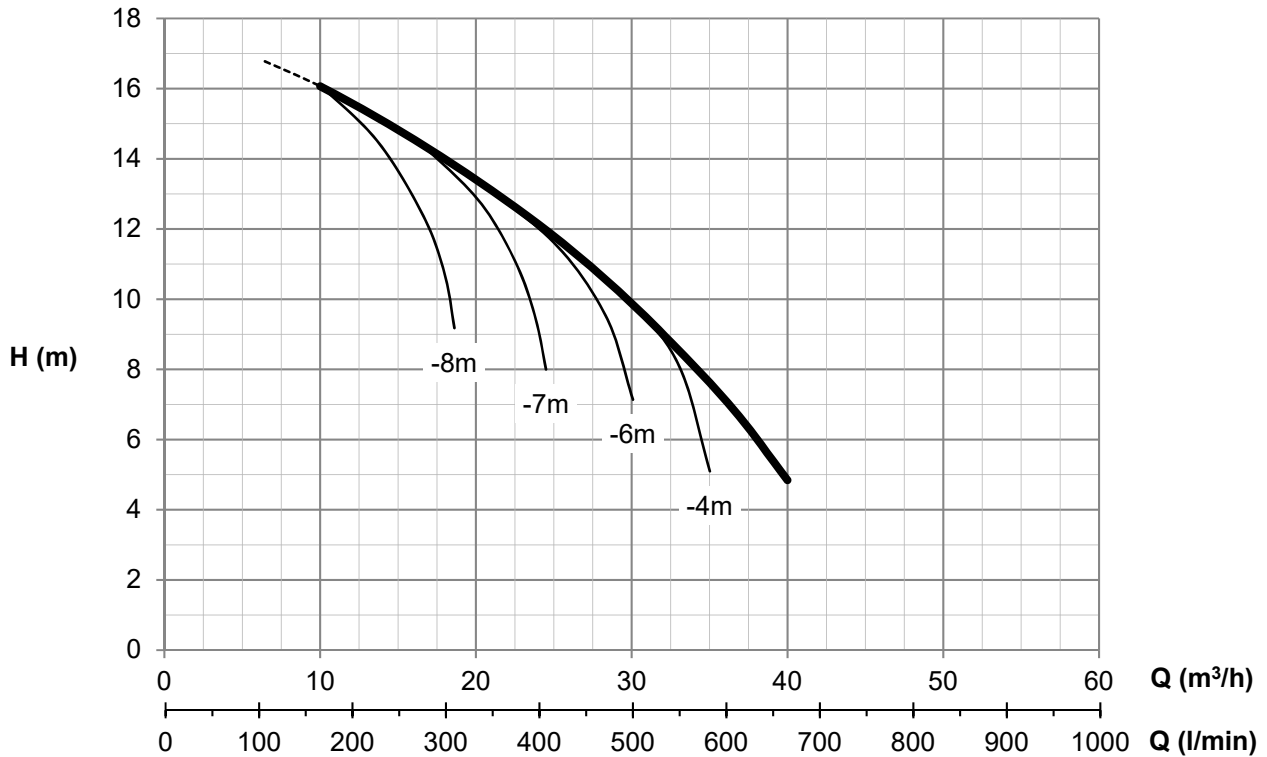

ISO 9906:2012 - GRADE 3B, ρ = 1 kg/dm³, ν = 1 mm²/s

DN 50