





S 40 - 50 Hz

Laufrad:
Impeller: Ø 109 mm
Girante:

Feststoffe bis:
Solids up to: Ø 20 mm
Solidi fino a:

Umdrehung:
Speed: ~ 2900 min⁻¹
Velocità:

T1510131 109 -> 109mm; 2900 -> 2900rpm

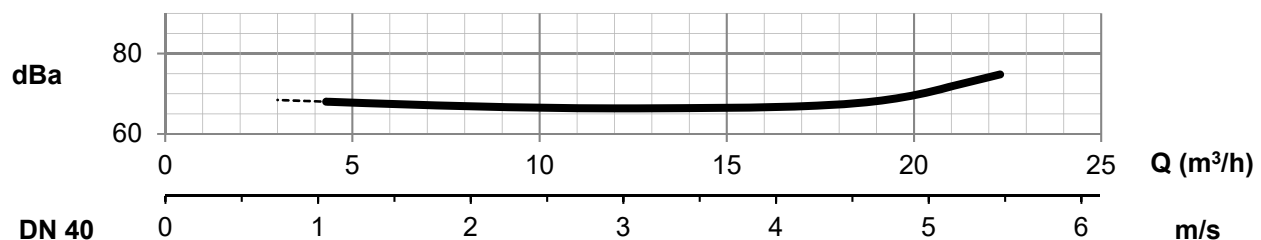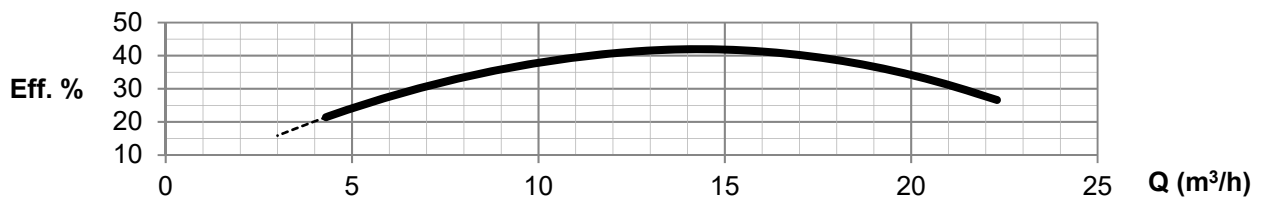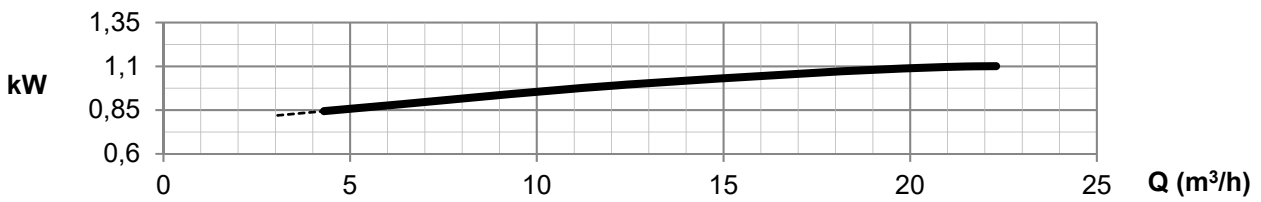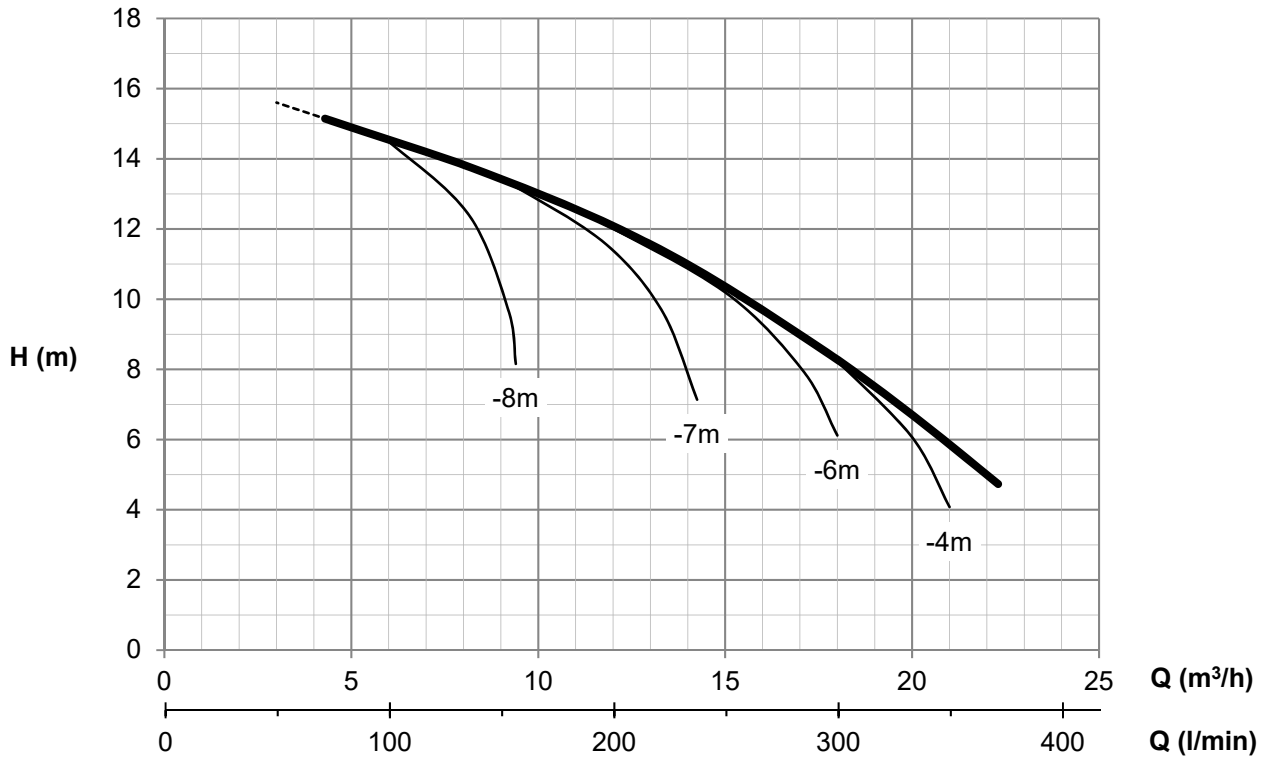

ISO 9906:2012 - GRADE 3B, $\rho = 1 \text{ kg/dm}^3$, $v = 1 \text{ mm}^2/\text{s}$

DN 40