





S 41 - 50 Hz

Laufrad:
Impeller: Ø 109 mm
Girante:

Feststoffe bis:
Solids up to: Ø 20 mm
Solidi fino a:

Umdrehung:
Speed: ~ 2900 min⁻¹
Velocità:

T1510131 109 -> 109mm; 2900 -> 2900rpm

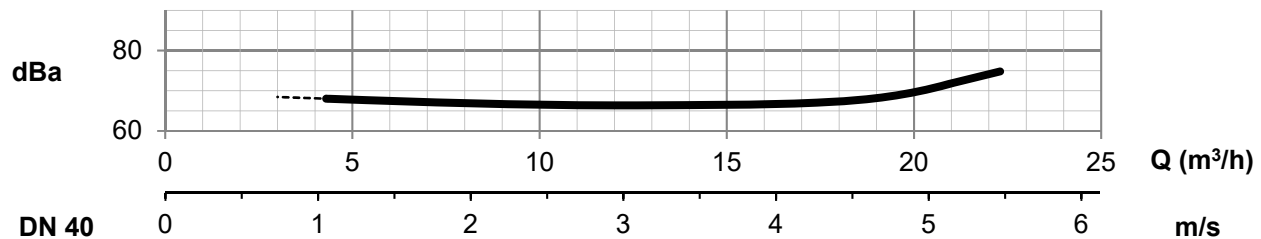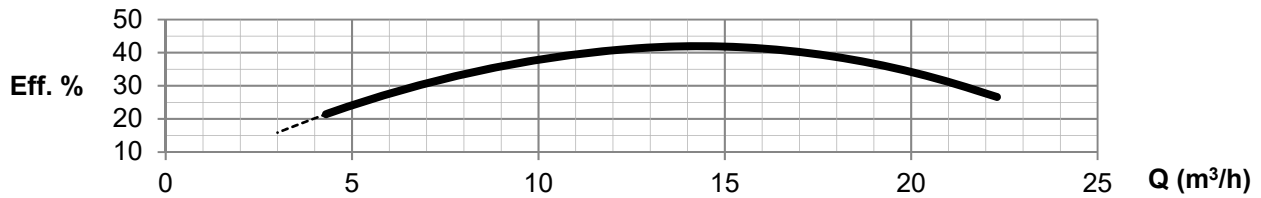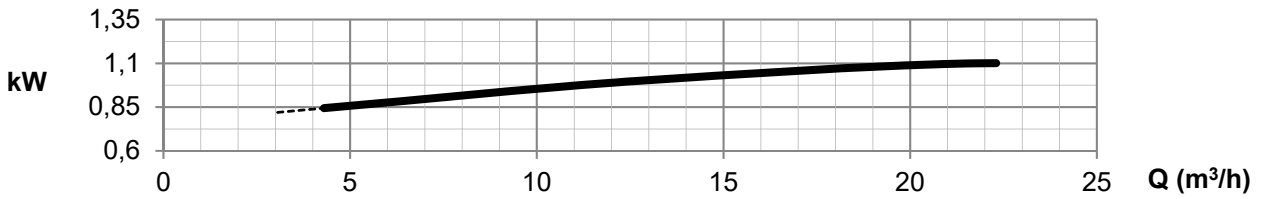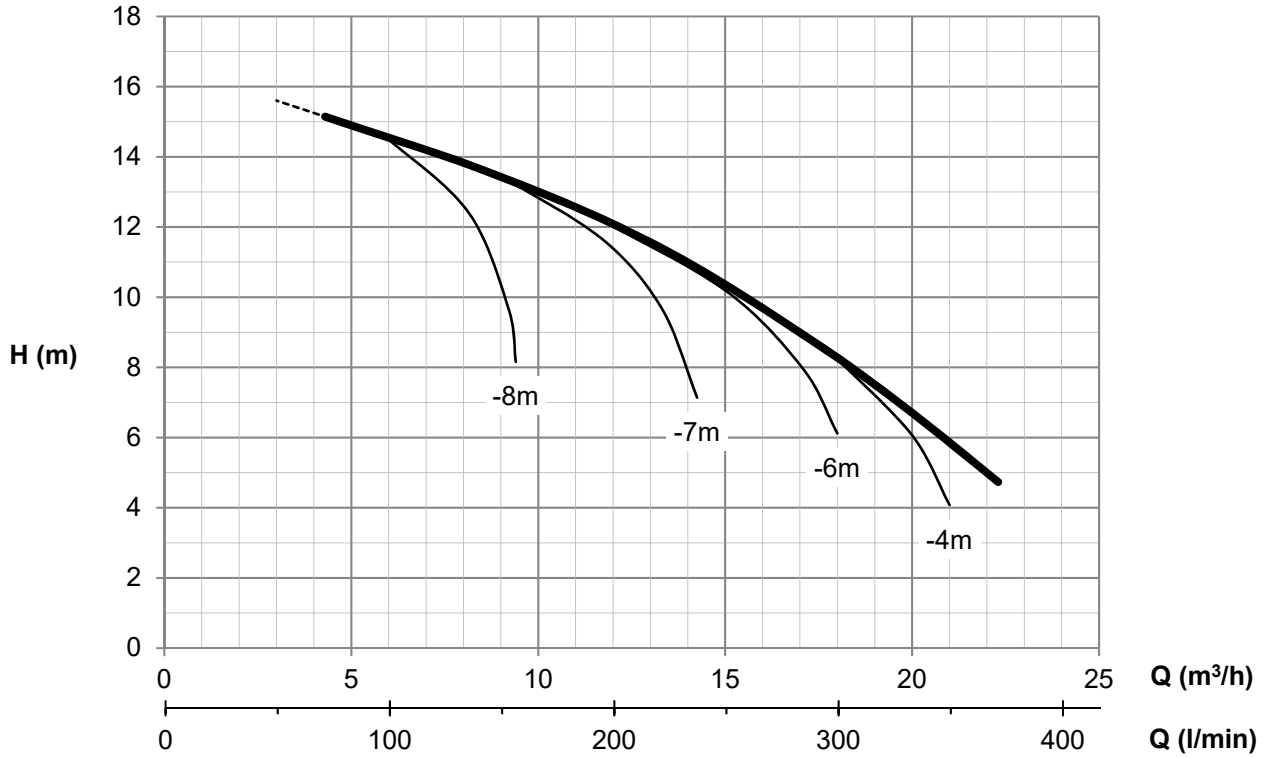

ISO 9906:2012 - GRADE 3B, ρ = 1 kg/dm³, v = 1 mm²/s

DN 40