





S 82+60 - 50 Hz

Laufрад:
Impeller: Ø 138 mm
Girante:

Feststoffe bis:
Solids up to: Ø 32 mm
Solidi fino a:

Umdrehung:
Speed: ~ 2935 min⁻¹
Velocità:

T1905291 138 -> 138mm; 2935 -> 2935rpm

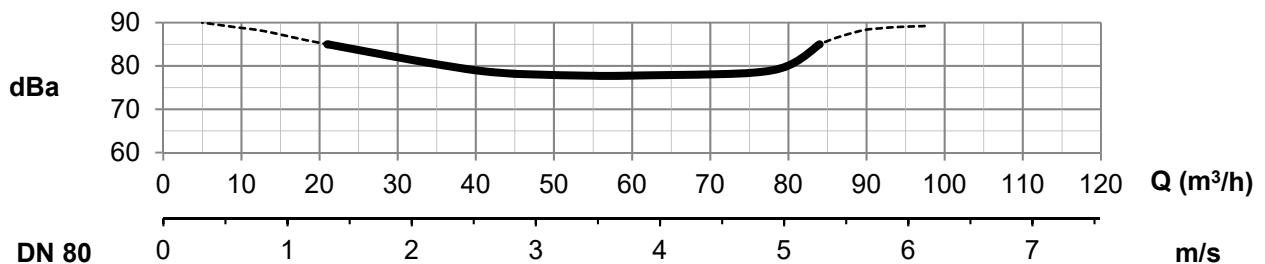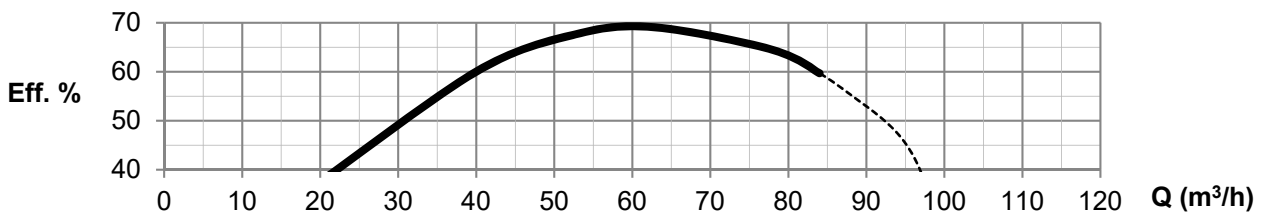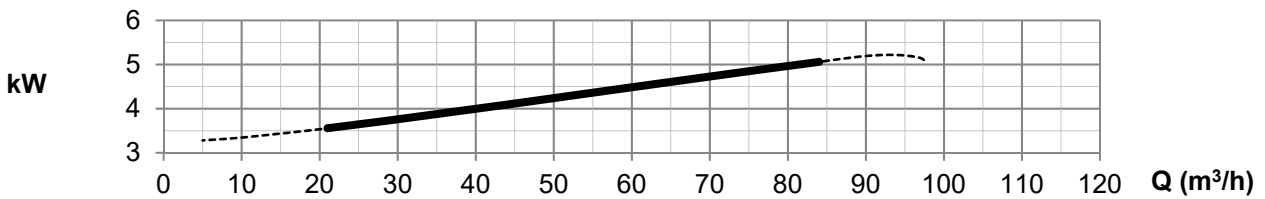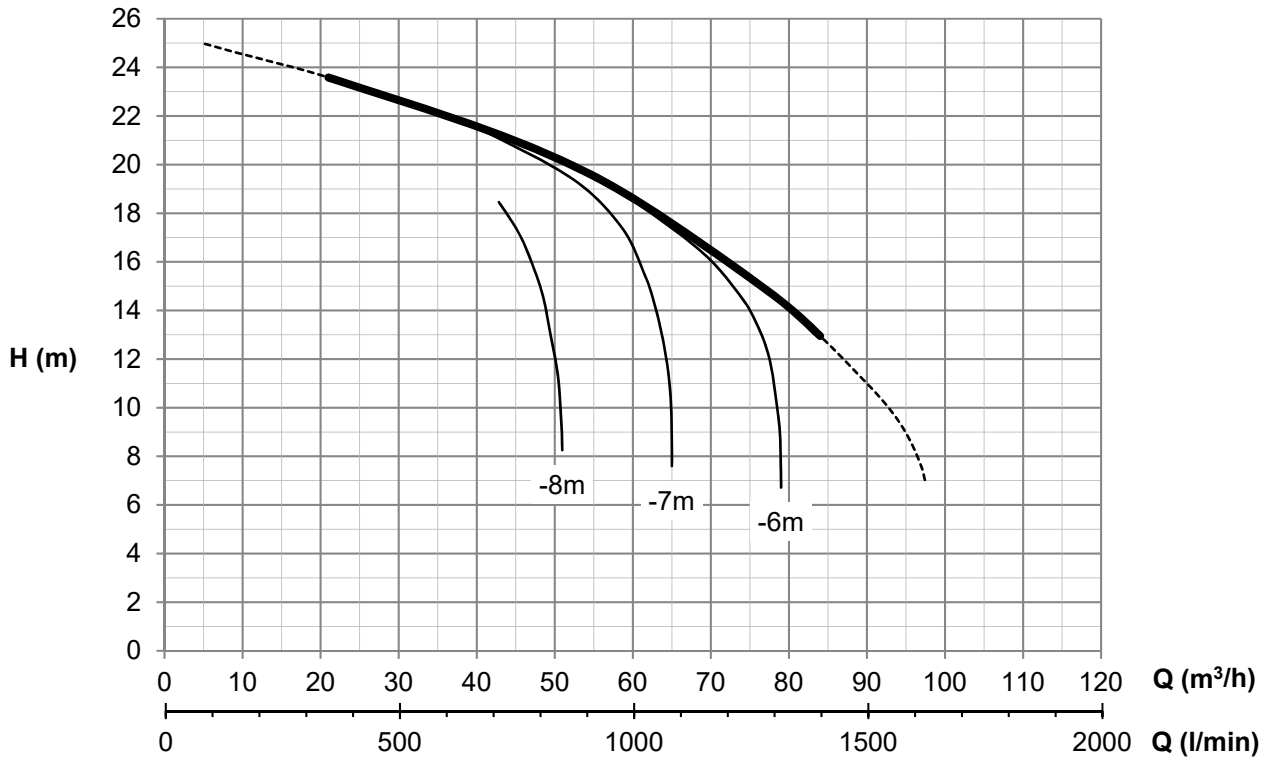

ISO 9906:2012 - GRADE 3B, $\rho = 1 \text{ kg/dm}^3$, $\nu = 1 \text{ mm}^2/\text{s}$