





# S 80+60 - 50 Hz

Laufрад:  
Impeller: Ø 138 mm  
Girante:

Feststoffe bis:  
Solids up to: Ø 32 mm  
Solidi fino a:

Umdrehung:  
Speed: ~ 2935 min<sup>-1</sup>  
Velocità:

T1905291 138 -> 138mm; 2935 -> 2935rpm

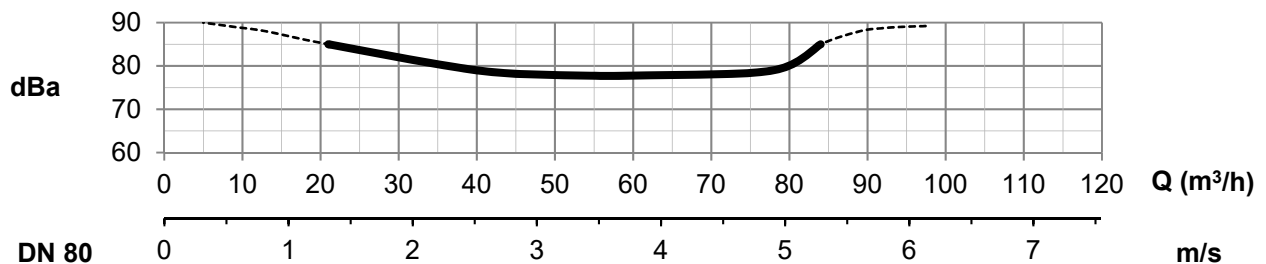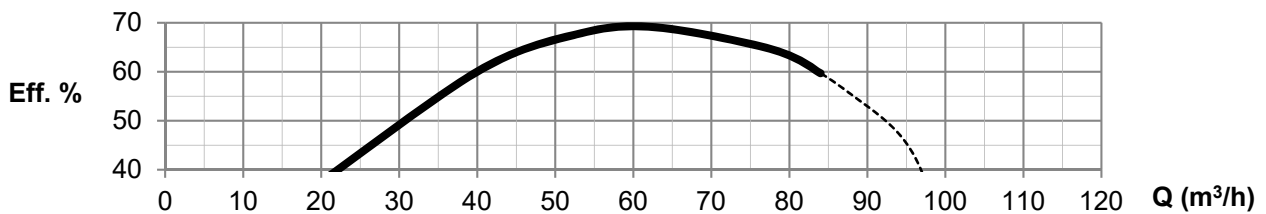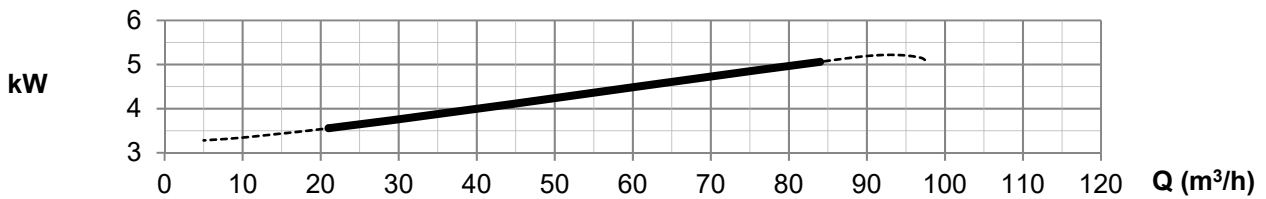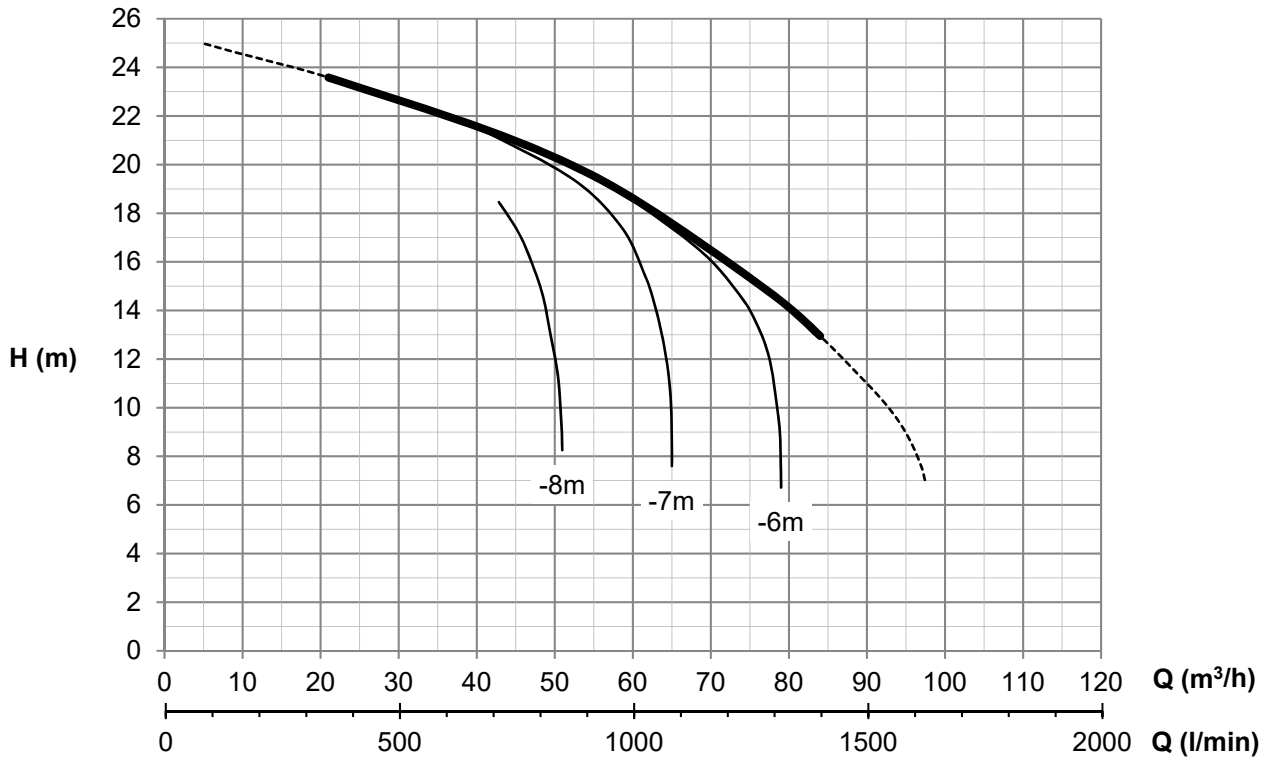

ISO 9906:2012 - GRADE 3B,  $\rho = 1 \text{ kg/dm}^3$ ,  $\nu = 1 \text{ mm}^2/\text{s}$