
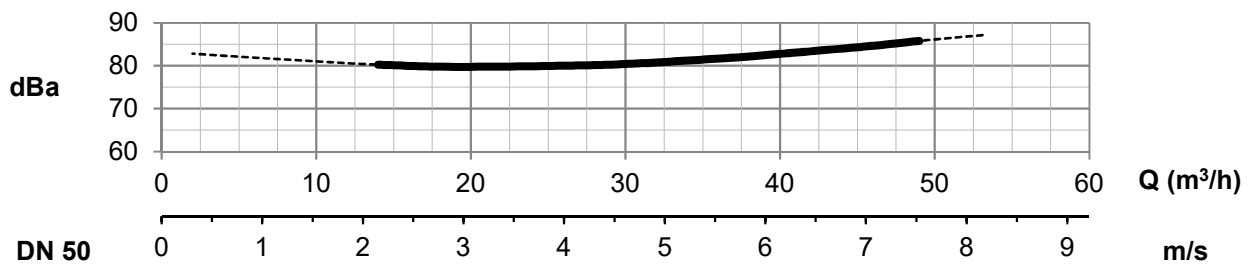
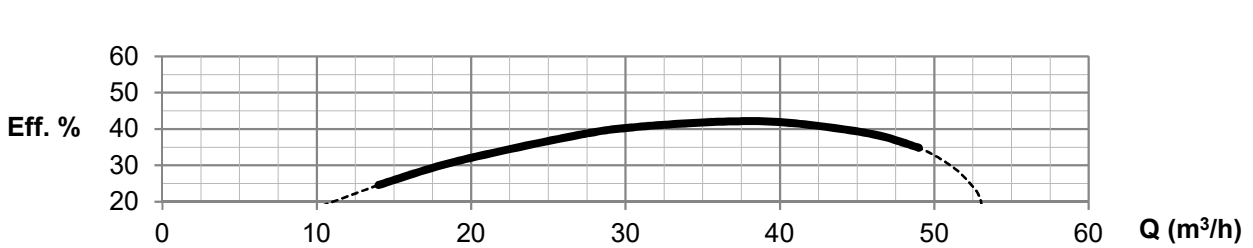
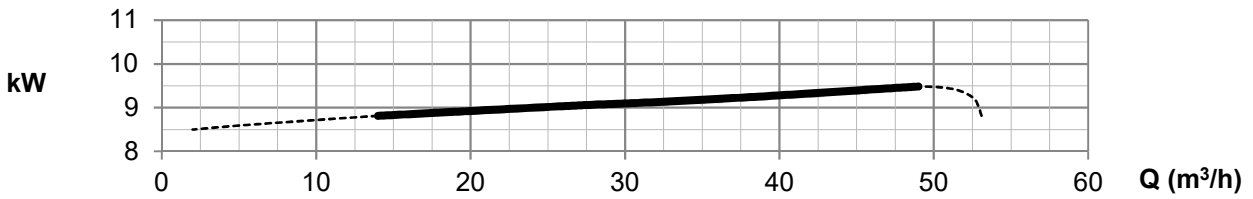


S 69+50 - 50 Hz

Laufrad:
Impeller: Ø 217 mm
Girante:
U1909061 217 -> 217mm; 2950 -> 2950rpm

Feststoffe bis:
Solids up to: Ø 25 mm
Solidi fino a:

Umdrehung:
Speed: ~ 2950 min-1
Velocità:

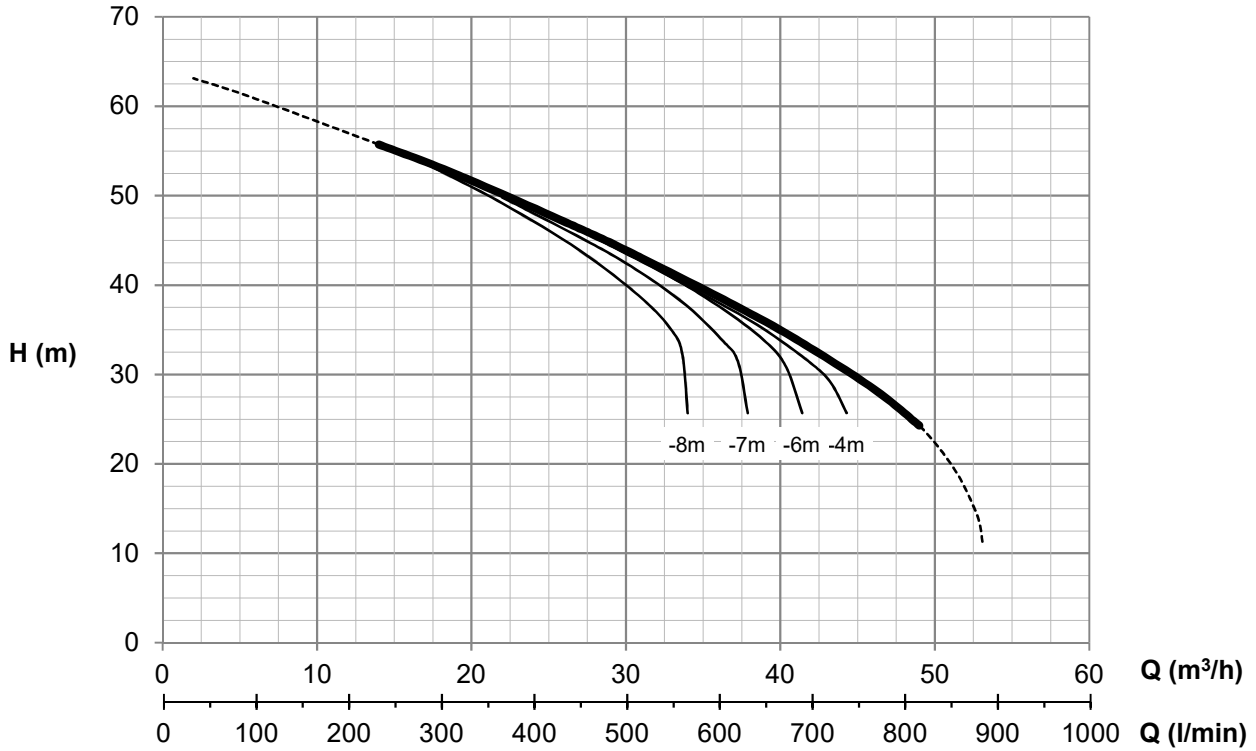

ISO 9906:2012 - GRADE 3B, $\rho = 1 \text{ kg/dm}^3$, $v = 1 \text{ mm}^2/\text{s}$

DN 50