





S180+50 - 50 Hz

Laufrad:
Impeller: Ø 342 mm
Girante:

Feststoffe bis:
Solids up to: Ø 40 mm
Solidi fino a:

Umdrehung:
Speed: ~ 1450 min⁻¹
Velocità:

P753090 342 -> 342mm; 1450 -> 1450rpm

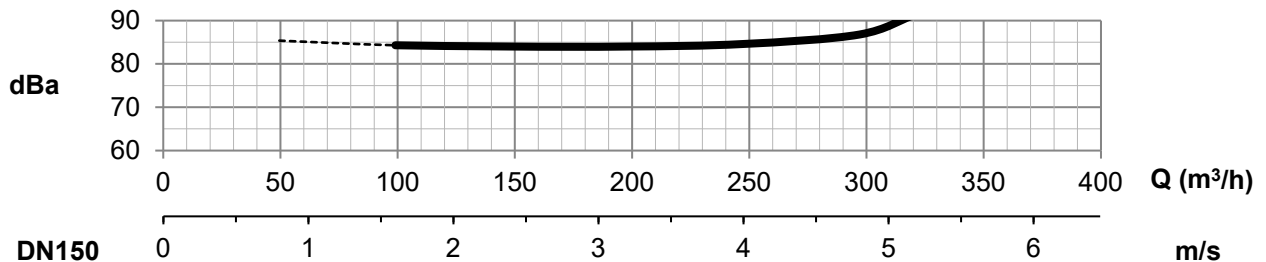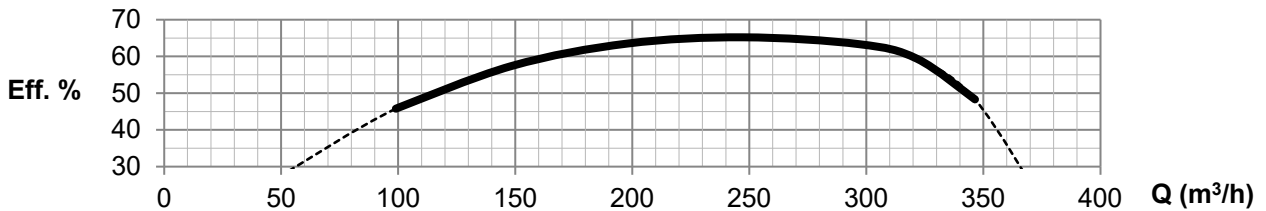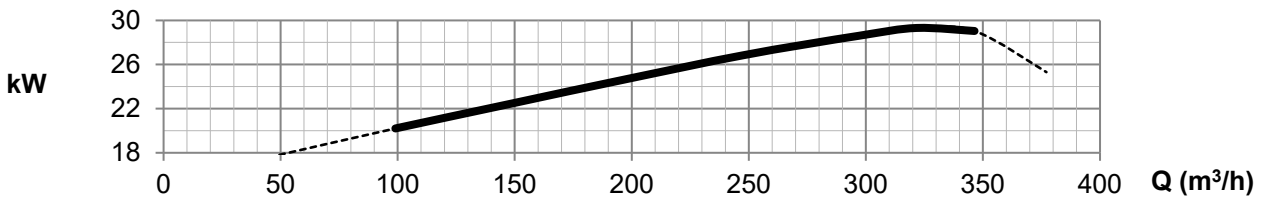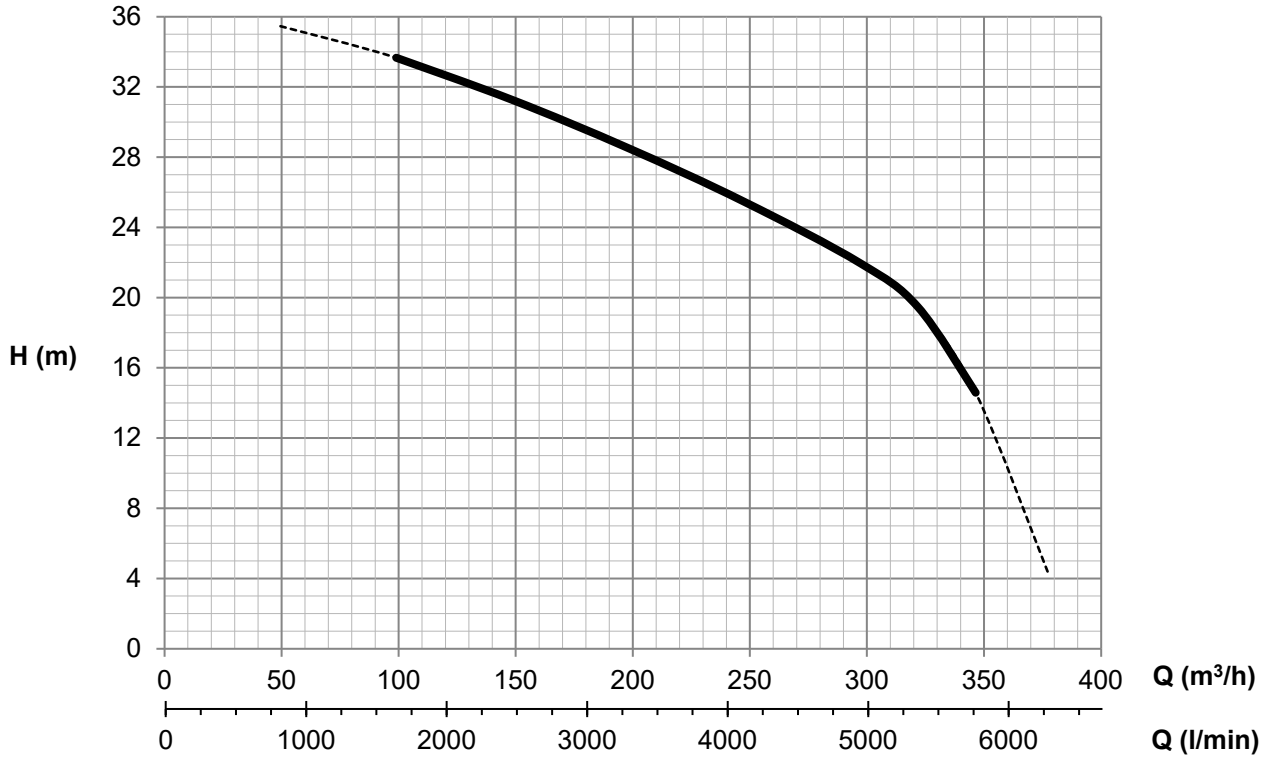

ISO 9906:2012 - GRADE 3B, ρ = 1 kg/dm³, v = 1 mm²/s, calculated