





# S61+60 - 50 Hz

Lauftrad:  
Impeller: Ø 165 mm  
Girante:

Feststoffe bis:  
Solids up to: Ø 24 mm  
Solidi fino a:

Umdrehung:  
Speed: ~ 2900 min<sup>-1</sup>  
Velocità:

T1804171 170 -> 165mm; 2900 -> 2900rpm

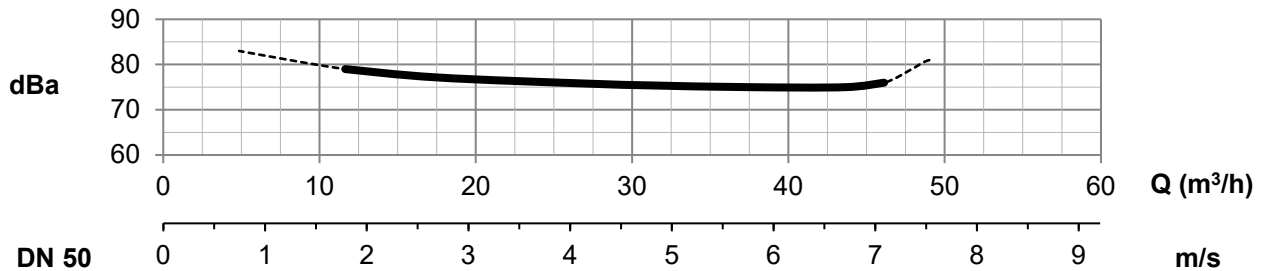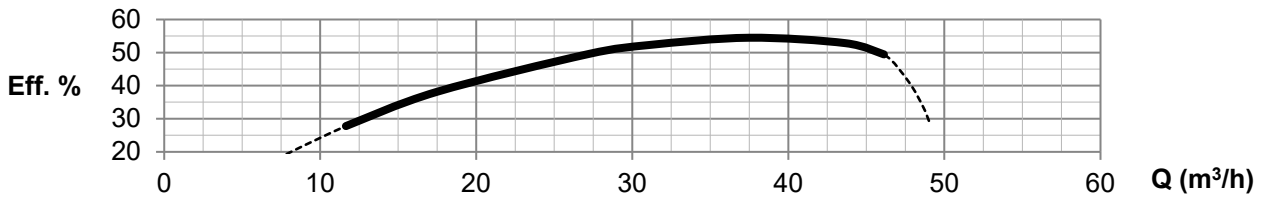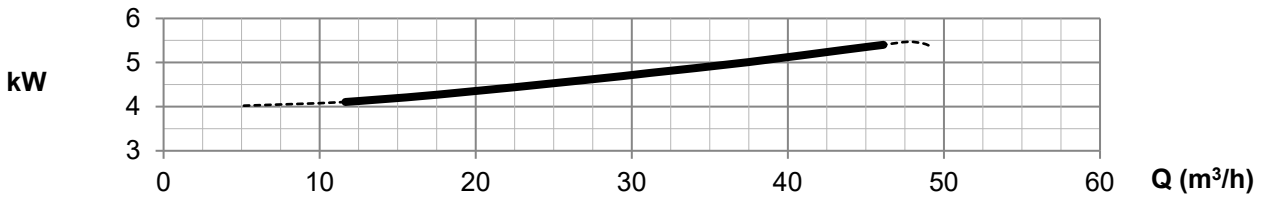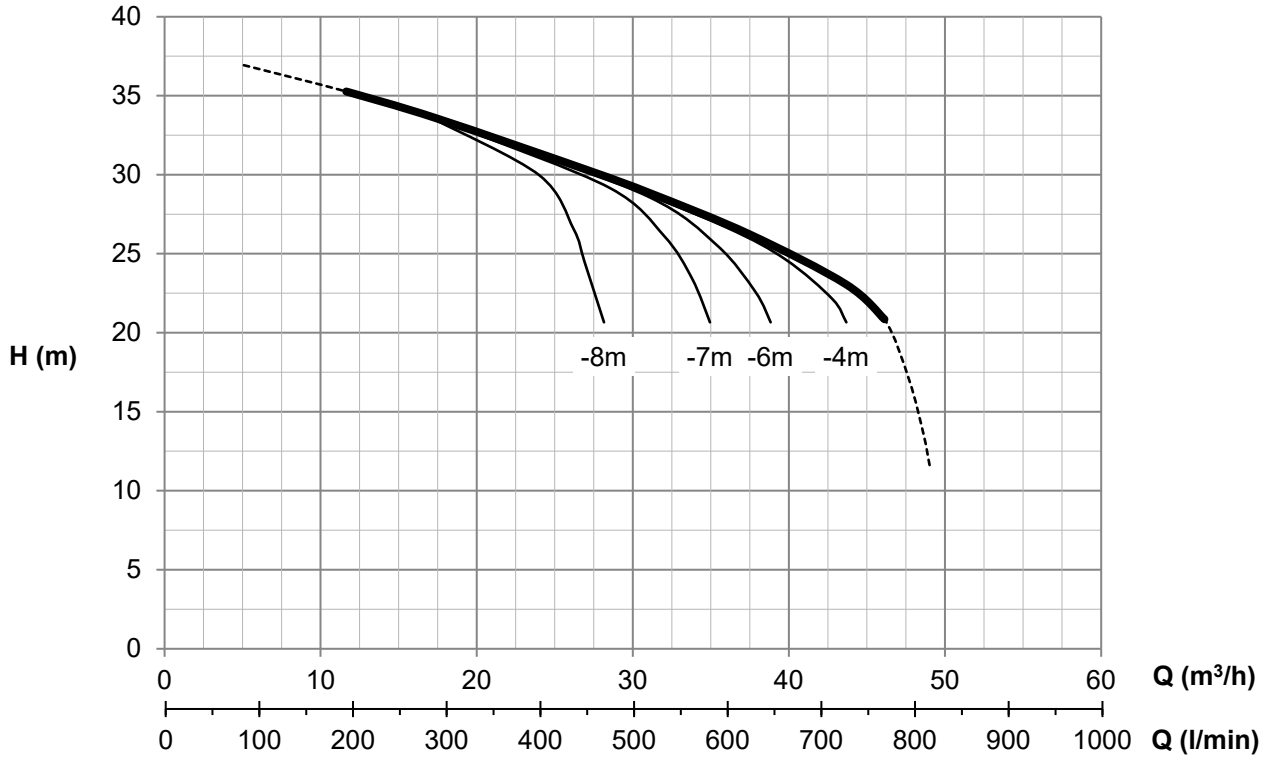

calculated