







**S 60+50 - 50 Hz**

Laufrad:  
 Impeller: Ø 169 mm  
 Girante:

Feststoffe bis:  
 Solids up to: Ø 24 mm  
 Solidi fino a:

Umdrehung:  
 Speed: ~ 2915 min<sup>-1</sup>  
 Velocità:

U3303311 170 -> 169mm; 2915 -> 2915rpm

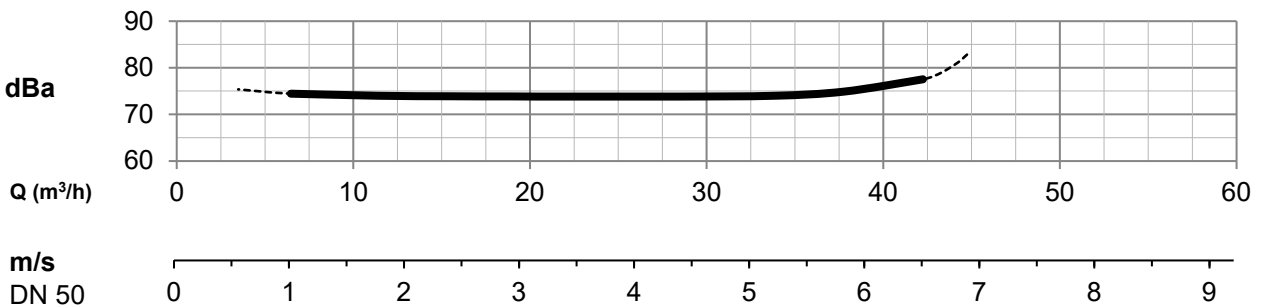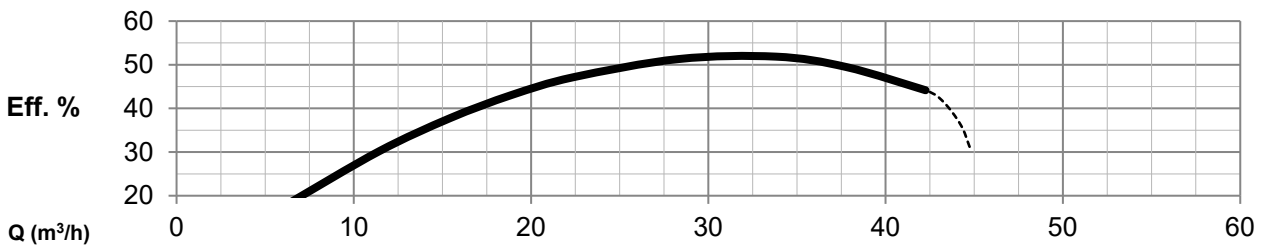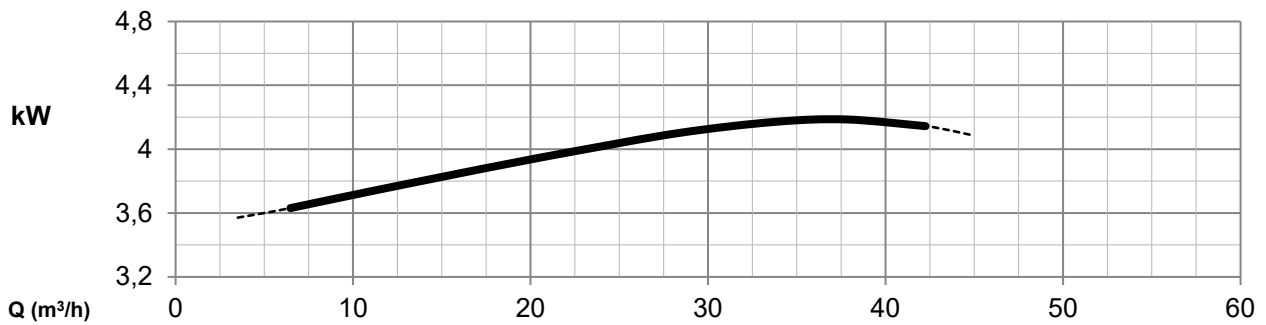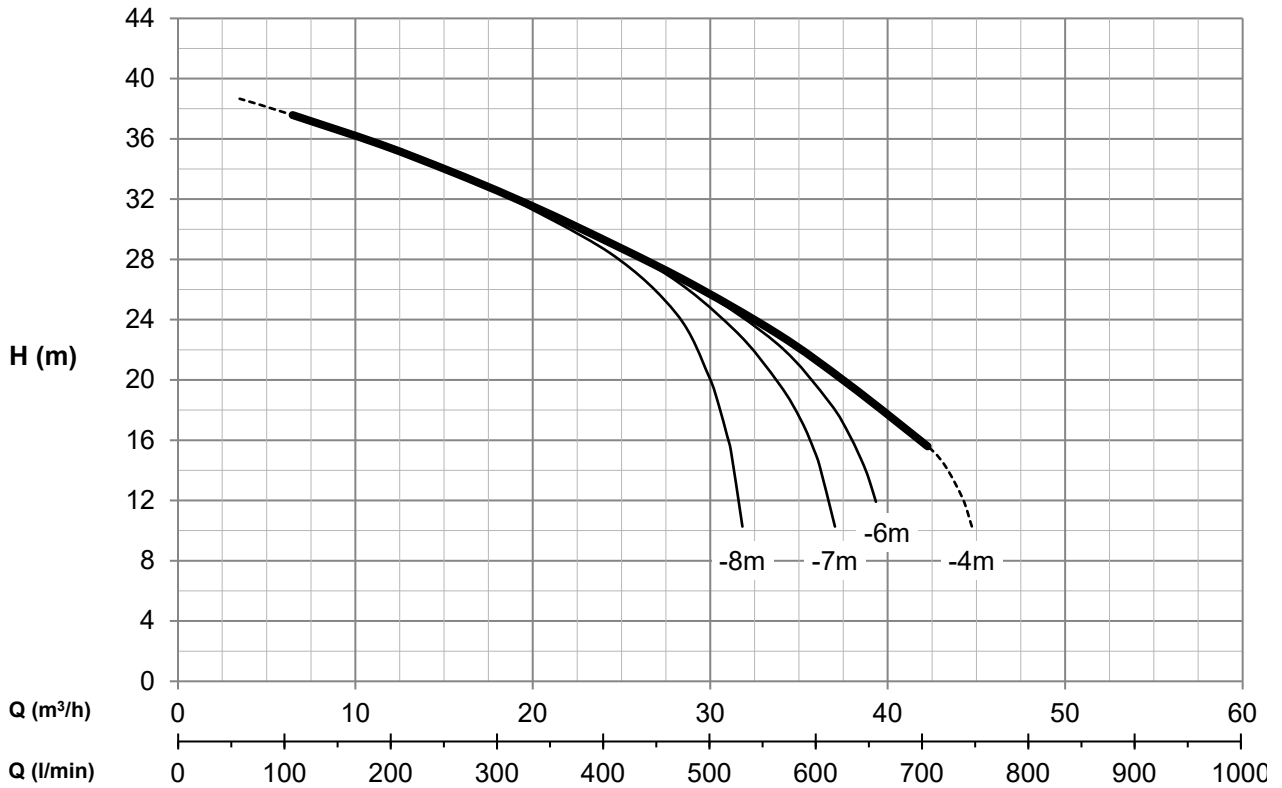

ISO 9906:2012 - GRADE 3B, ρ = 1 kg/dm³, v = 1 mm²/s

m/s  
 DN 50