







S 48+50 - 50 Hz

Laufrad:
 Impeller: Ø 170 mm
 Girante:

Feststoffe bis:
 Solids up to: Ø 14x19 mm
 Solidi fino a:

Umdrehung:
 Speed: ~ 2920 min-1
 Velocità:

T1904191 170 -> 170mm; 2920 -> 2920rpm

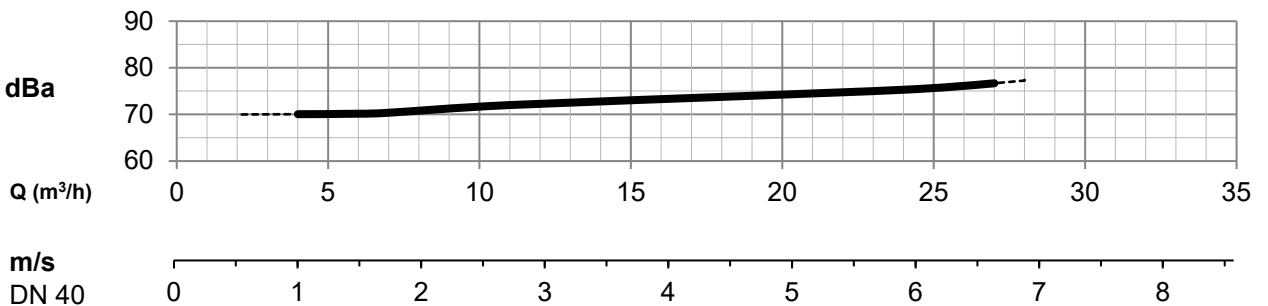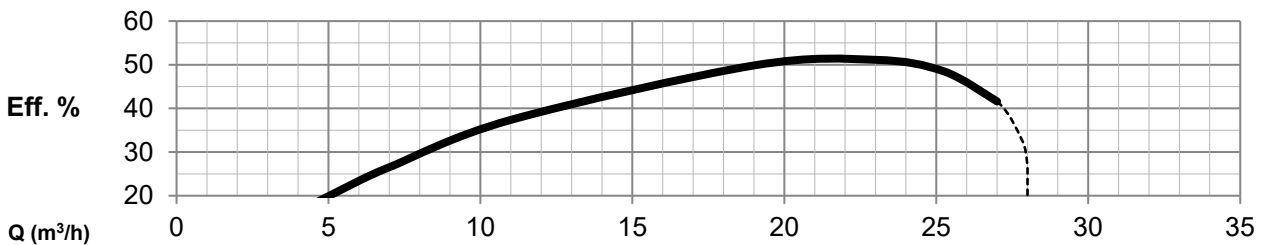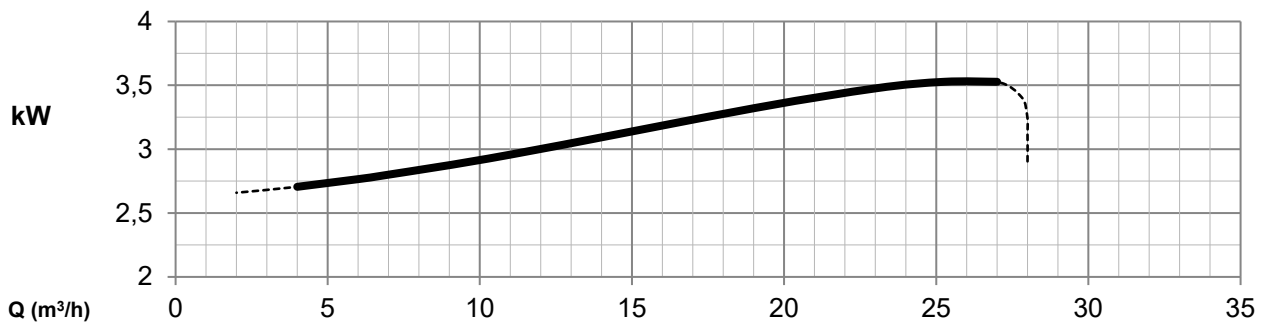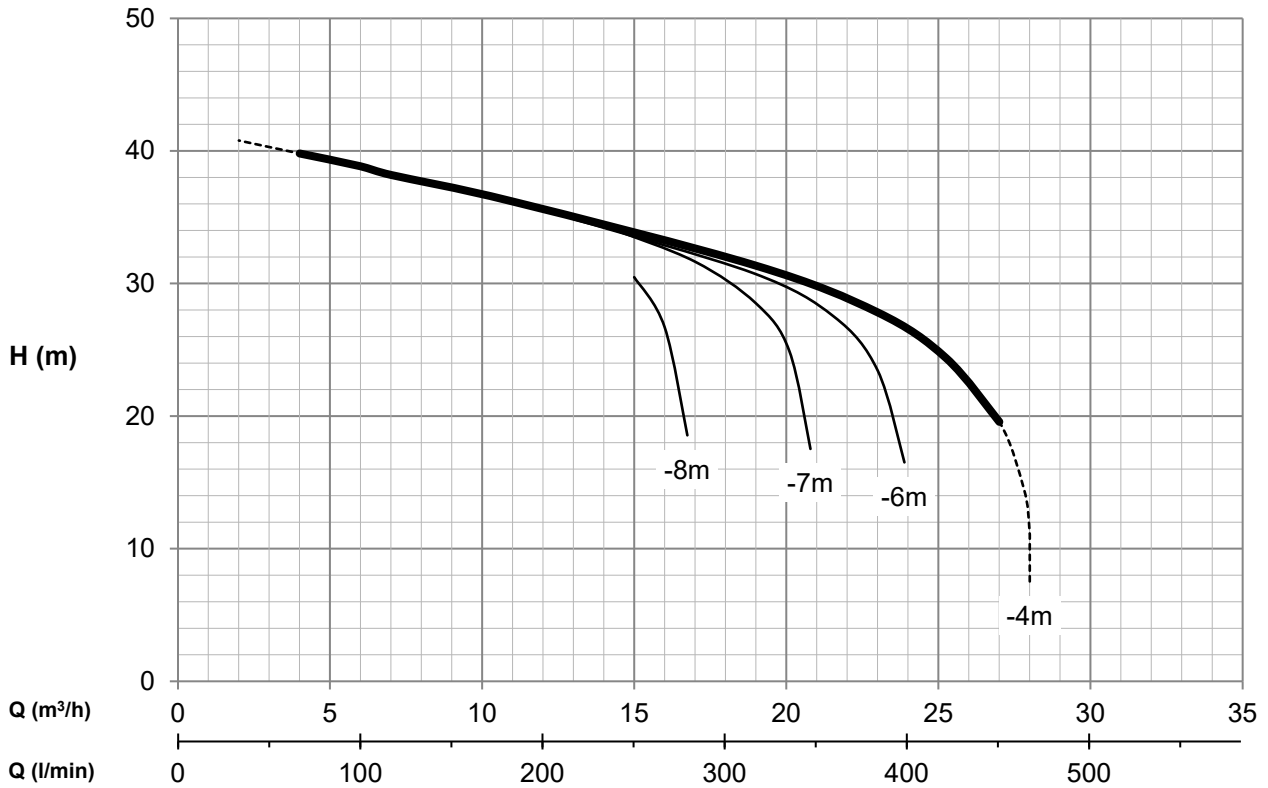

ISO 9906:2012 - GRADE 3B, ρ = 1 kg/dm³, v = 1 mm²/s