







S 69+50 - 50 Hz

Laufrad:
 Impeller: Ø 216 mm
 Girante:
 U2301121 216 -> 216mm; 2940 -> 2940rpm

Feststoffe bis:
 Solids up to: Ø 25 mm
 Solidi fino a:

Umdrehung:
 Speed: ~ 2940 min-1
 Velocità:

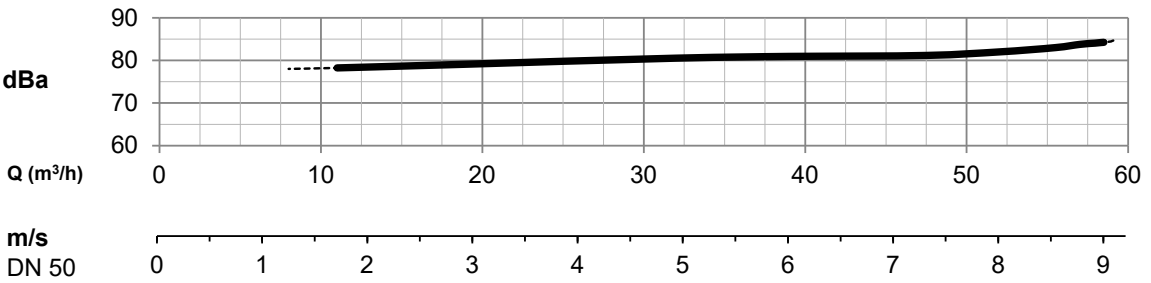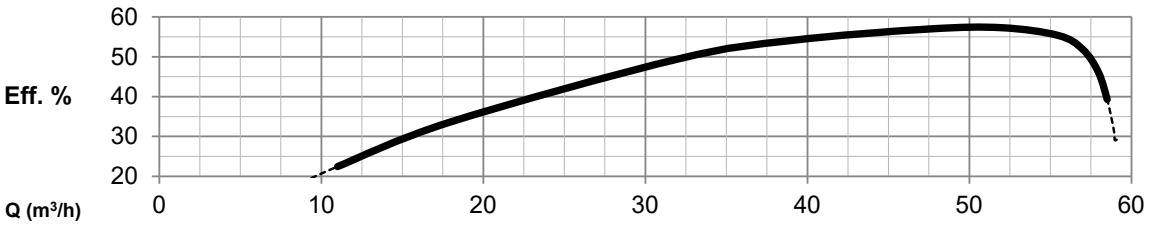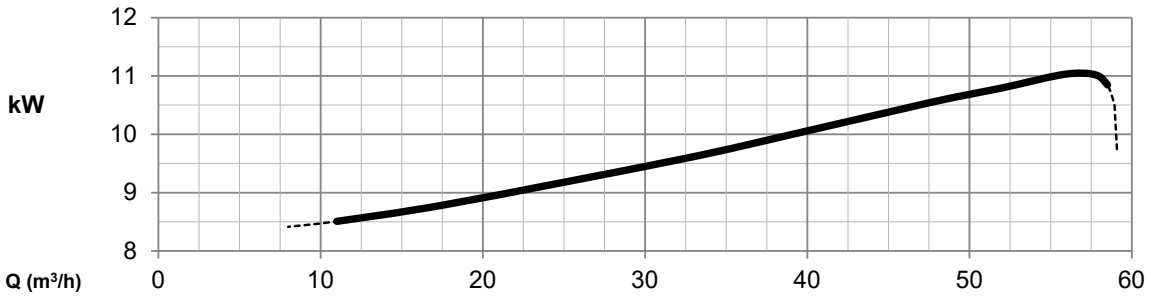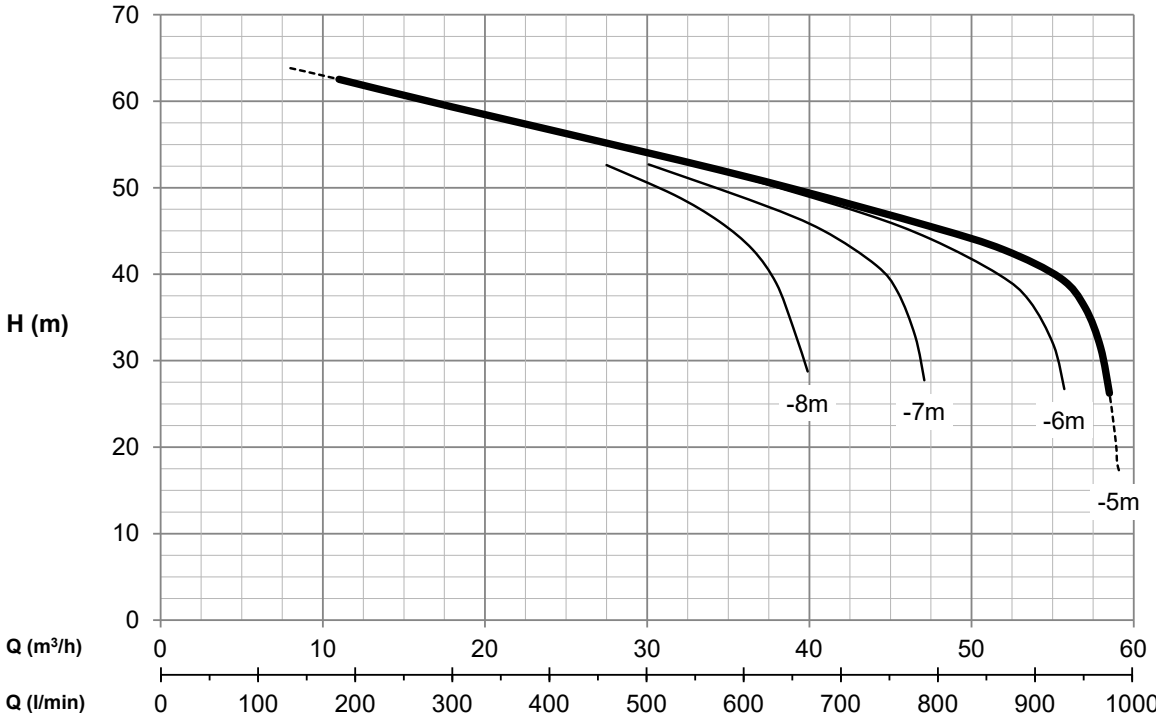

ISO 9906:2012 - GRADE 3B, p = 1 kg/dm³, v = 1 mm²/s