







S 62+50 - 50 Hz

Laufrad:
 Impeller: Ø 170 mm
 Girante:

Feststoffe bis:
 Solids up to: Ø 17 mm
 Solidi fino a:

Umdrehung:
 Speed: ~ 2920 min-1
 Velocità:

U2307311 170 -> 170mm; 2920 -> 2920rpm

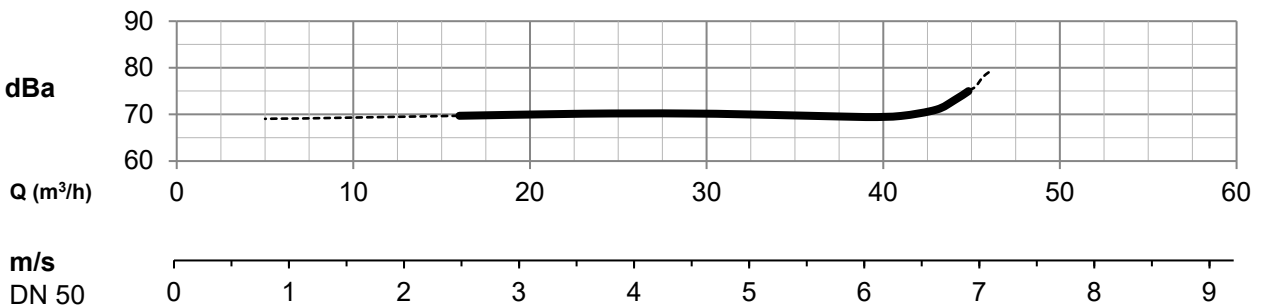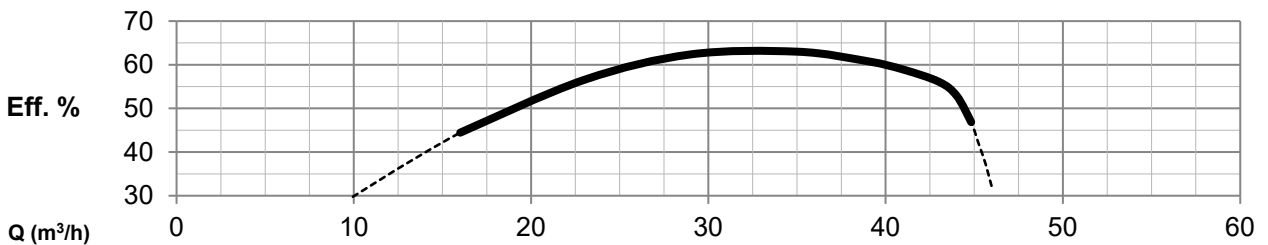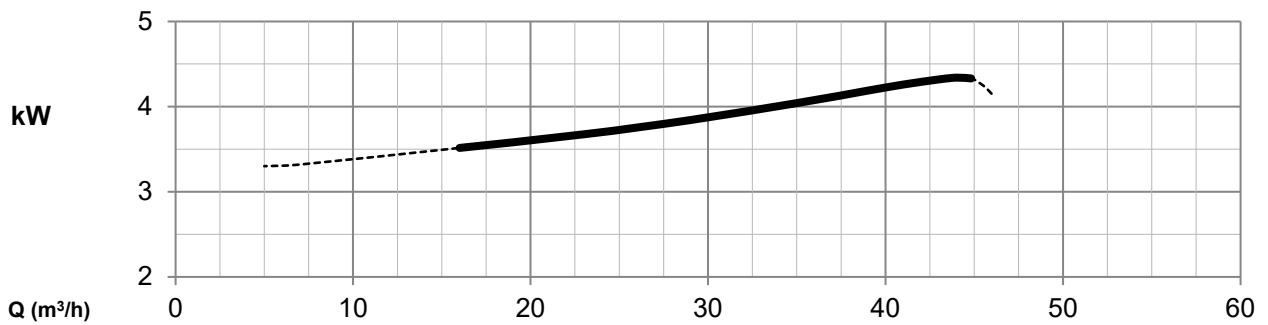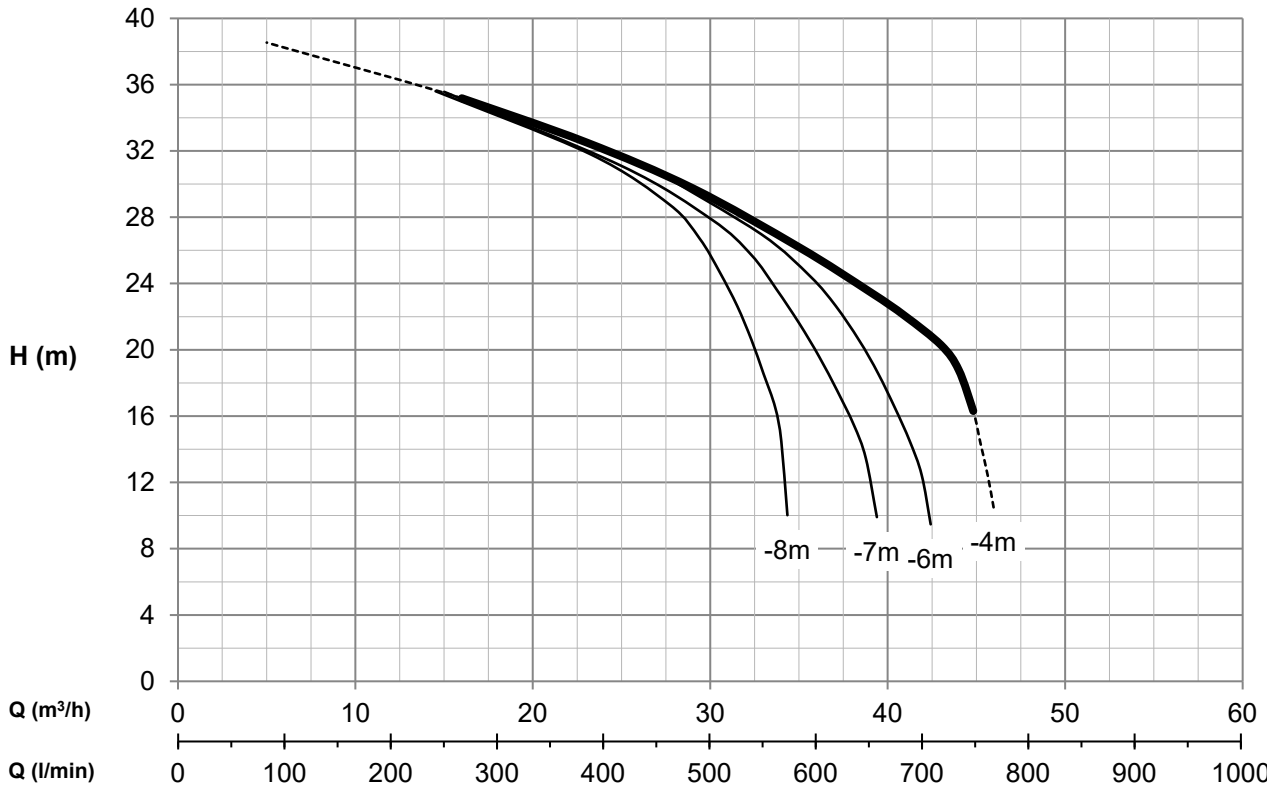

ISO 9906:2012 - GRADE 3B, $\rho = 1 \text{ kg/dm}^3$, $v = 1 \text{ mm}^2/\text{s}$