





# C 30 - 50 Hz

Laufрад:  
Impeller: Ø 109 mm  
Girante:

Feststoffe bis:  
Solids up to: 11 mm Ø  
Solidi fino a:

Umdrehung:  
Speed: ~ 2850 min-1  
Velocità:

T1512091 109 -> 109mm; 2850 -> 2850rpm

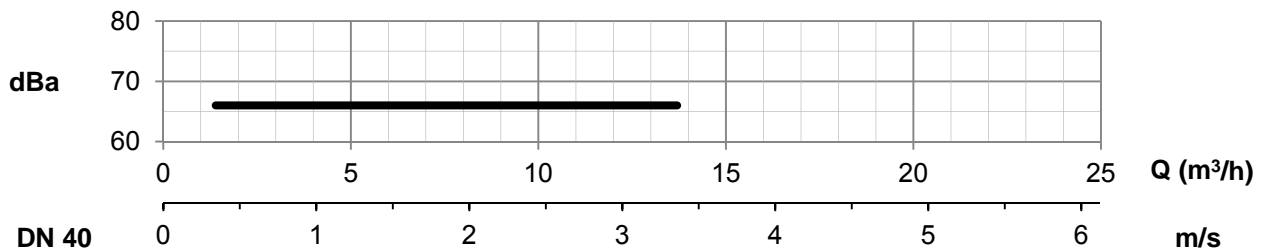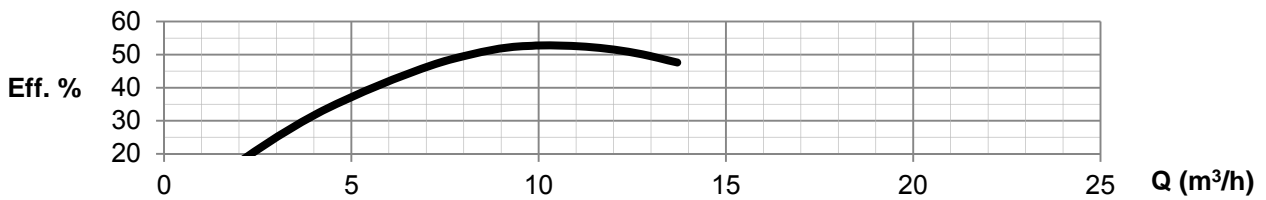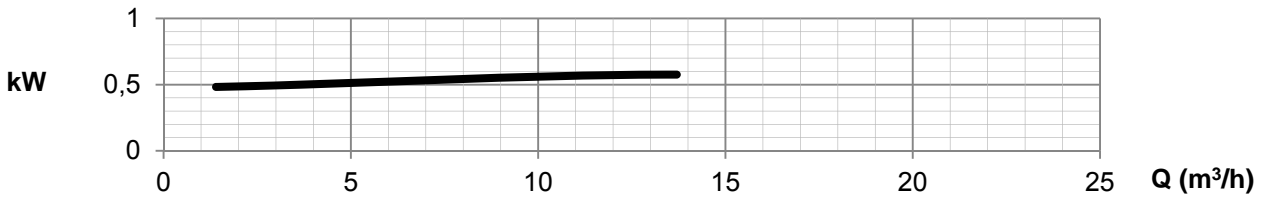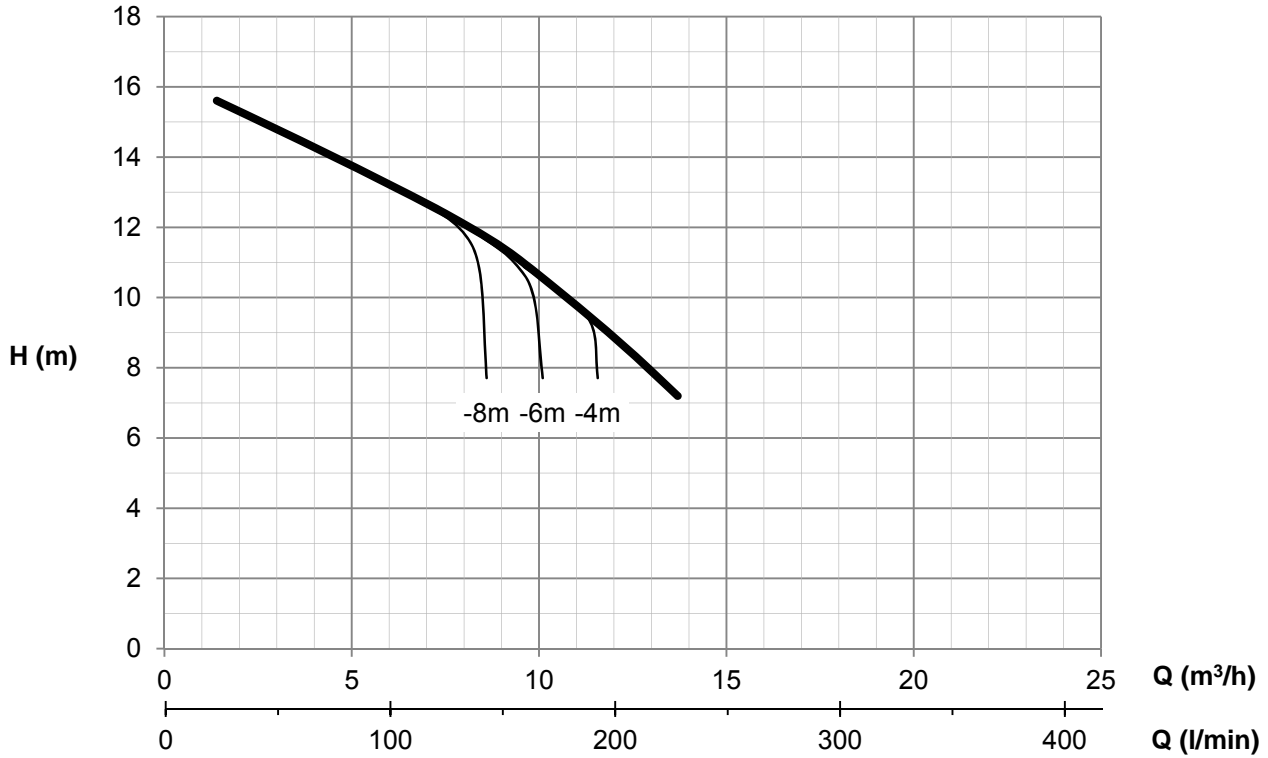

ISO 9906:2012 - GRADE 3B, ρ = 1 kg/dm³, ν = 1 mm²/s

DN 40